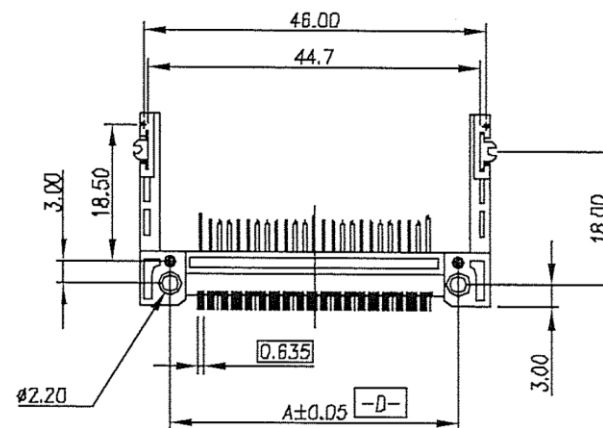

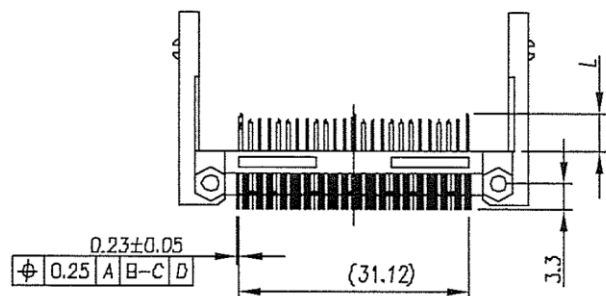
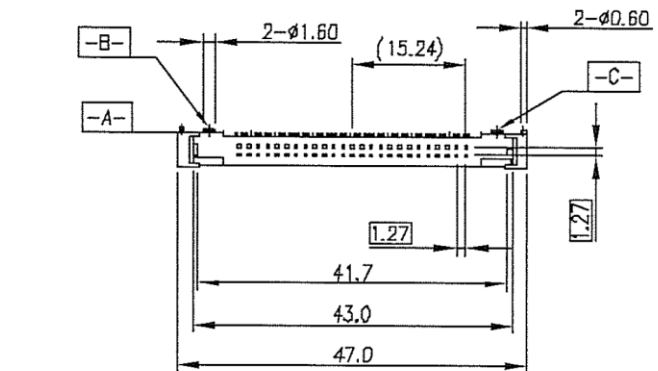


RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X $\pm$ 0.30

.XX $\pm$ 0.20

.XXX $\pm$ 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

CFC-PWxxCE002-50-LF


SERIES T T T T T LEADFREE

MALE T T T T T 50WAY


90°SMT C TYPE

38: POST TO POST 38.74mm
40: POST TO POST 40.16mm

DESCRIPTION:

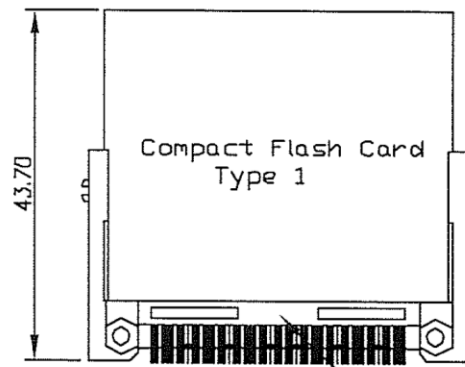

—For Vacuum Pick
(10.0mm*2.8mm)



HOUSING : High Temperature Plastic, UL 94V-0
CONTACT : Copper Alloys
VOLTAGE RATING : 100VAC
CURRENT RATING : 0.5A
CONTACT RESISTANCE:40 m Ohm max.
INSULATION RESISTANCE:1000M Ohm min.
DIELECTRIC STRENGTH : 500VAC/1min
OPERATION TEMPERATURE : -40°C~85°C

DESCRIPTION: