


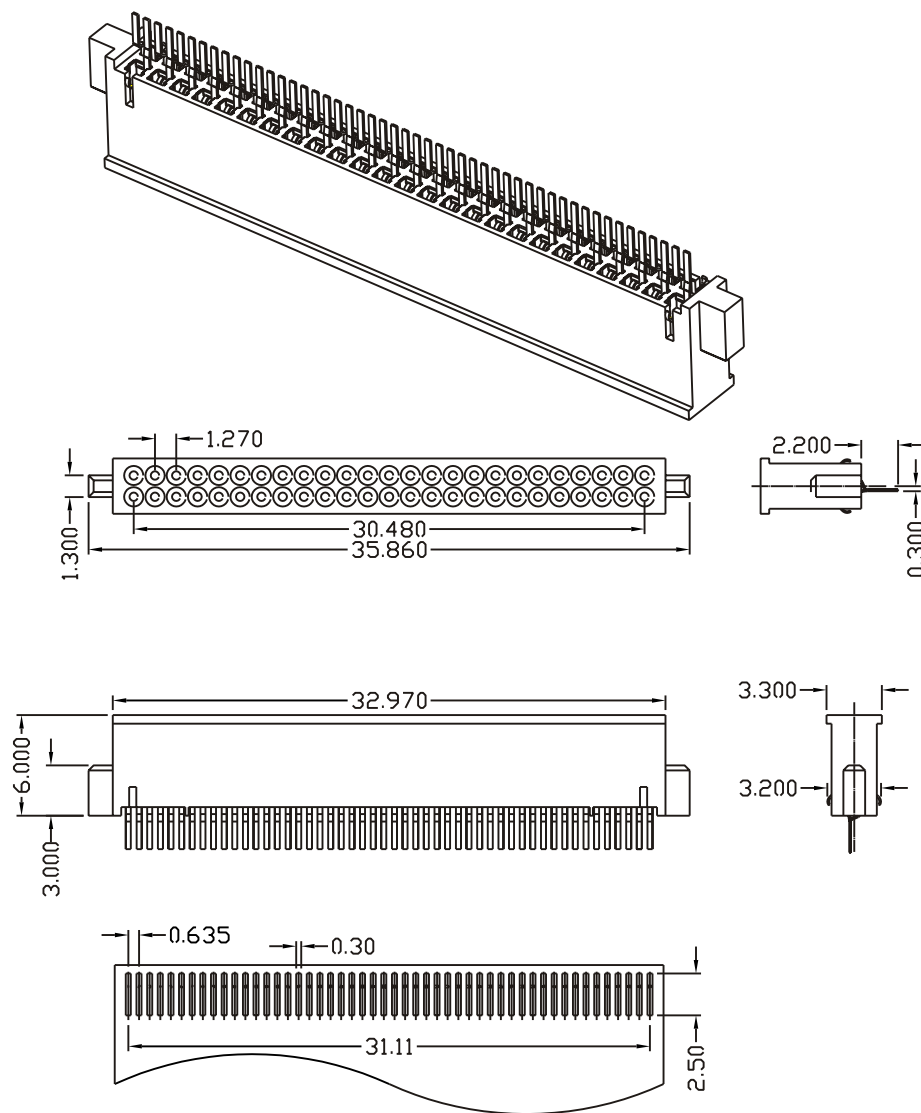

RECOMMENDED P.C.B LAYOUT

NOTES:

1.ELECTRICAL :

CURRENT : 0.5A
CONTACT RESISTANCE : 40M Ω MAX
DIELECTRIC WITHSTANDING : 500V AC
INSULATION RESISTANCE : 1000M Ω MIN

2.MECHANICAL :

CONTACT RETENTION TO HOUSING : 4.9N MIN
MATING FORCE : 28.8N MAX
UNMATING FORCE : 4.9N MIN
DURABILITY : 10,000 CYCLES

3.MATERIAL :

INSULATOR : LCP
COLOR : BLACK
CONTACT : PHOSPHOR BRONZE

4.PLATING :

CONTACT AREA : 1U" GOLD , 5U" GOLD , 15U" GOLD
UNDER PLATING : NICKEL OVERALL
SOLDER TAIL AREA : TIN/LEAD

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PROJECTION

照片框

ORDER INFORMATION

CFC-SWA03M-50-LF
SERIES T T T T LEADFREE
50WAY
MIDDLE TYPE
OFFSET 0.30mm
FEMALE A TYPE
90°SMT

DESCRIPTION: CFF-SMT (MIDDLE TYPE)