


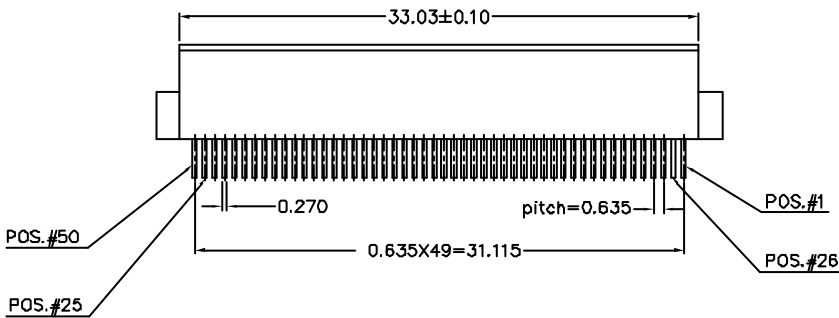


Recommend PCB Layout

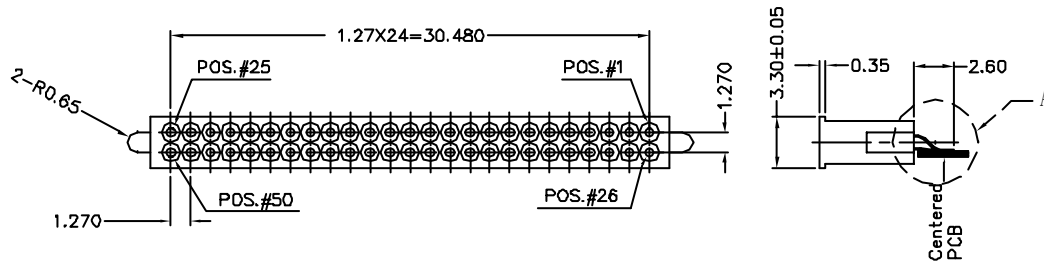

A Picture  
DETAIL "A" S=4:1



B Picture  
DETAIL "A" S=4:1

Note

- Material : Glass Filled LCP (Black)  
Flammability : UL 94V-0  
Contact Material : Copper Alloy
- Plating :  
Underplate : 30u"(0.76um) Nickel  
Wiping Area : 10u"(0.254um) Gold  
Solder Tails : 100u"(2.54um) Tin
- Electrical  
Current Rating : 0.5A  
Insulation Resistance : >1x10<sup>9</sup> ohm at 500 Vdc  
>1x10<sup>8</sup> ohm at 500 Vdc  
after Environmental Conditioning  
Withstanding Voltage : 500 Vrms at Sea Level
- Environmental  
Temperature Rating : -10°C to +70°C
- D6(offset 0.6mm) use A picture  
D8(offset 0.8mm) use B picture

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION

照片框

ORDER INFORMATION

CFC-SWAx-50-LF

SERIES | | | LEADFREE  
50WAY  
06: OFFSET 0.60mm  
08: OFFSET 0.80mm  
FEMALE | A TYPE  
90°SMT

DESCRIPTION: