
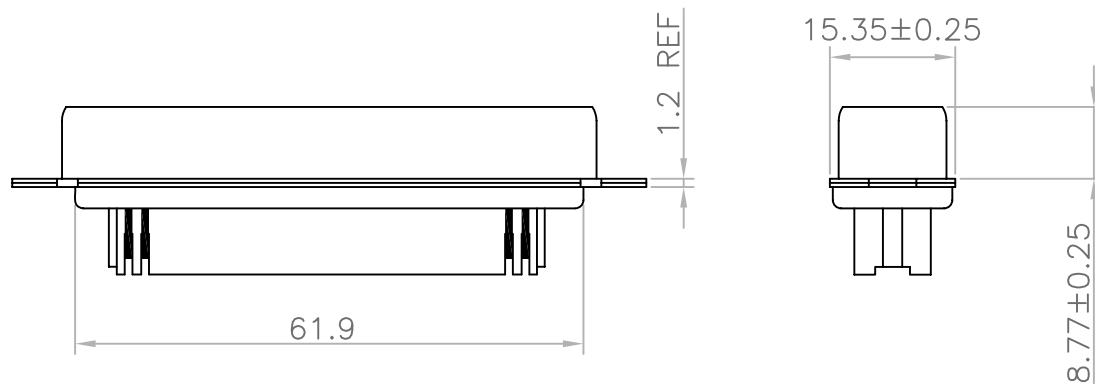


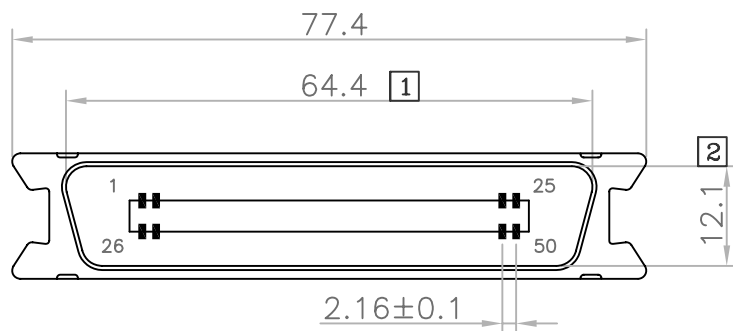

## Material & Finish

### SHELL:

Steel  
Zinc plated, Tin plated  
or Nickel plated steel

### PIN CONTACT:

Phosphor bronze or brass  
Gold plated

### INSULATOR:

PBT & Glass-fibre reinforced  
UL-94-V0

### CURRENT RATING:

5 Amp

### DIELECTRIC STRENGTH:

1000V for one minute

### INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

### TEMPERATURE:

-55°C to +105°C

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.25  
.XXX ± 0.15  
ANG ± 3°

照片框

ORDER INFORMATION

CI-P-50-LF  
SERIES | T LEADFREE  
50 WAY  
MALE

DESCRIPTION: CONTRONIC IDC TYPE MALE 50PIN