



Mated Drawing(REF.)

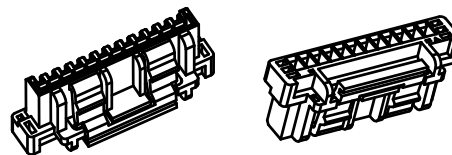





12 pin 3D view

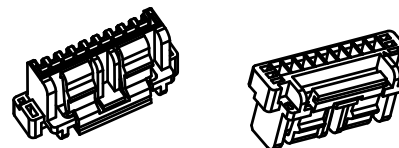


9 pin 3D view



5 pin 3D view

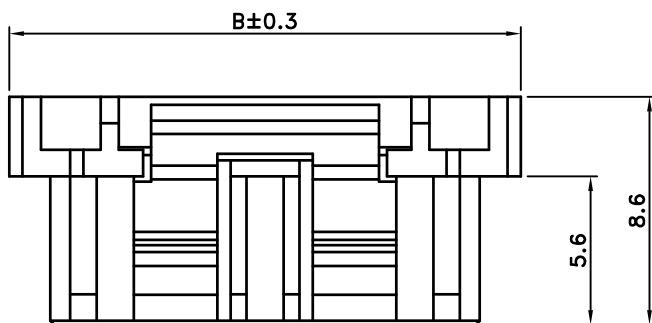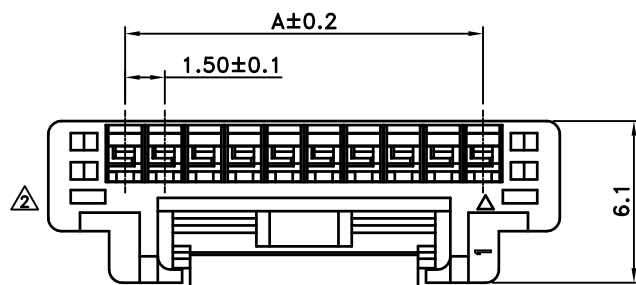

2~5PIN

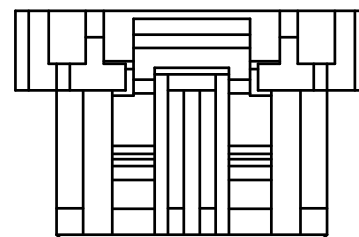

6~9PIN

SPECIFICATIONS

- Current Rating : 2A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500M Ω min.
- Temperature Range : - 40°C to + 85°C
- Contact Resistance : 20m Ω max.

HOUSING

- Poles : 2~15
- Material : PBT UL94V-0

Poles	Dimension(mm)		
	A	B	C
2	1.50	7.30	4.20
3	3.00	8.80	5.70
4	4.50	10.30	7.20
5	6.00	11.80	8.70
6	7.50	13.30	10.20
7	9.00	14.80	11.70
8	10.50	16.30	13.20
9	12.00	17.80	14.70
10	13.50	19.30	16.20
11	15.00	20.80	17.70
12	16.50	22.30	19.20
13	18.00	23.80	20.70
14	19.50	25.30	22.20
15	21.00	26.80	23.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

CLM15-H-1Xxx-LF

SERIES


LEADFREE

1X02:02 WAY

1X15:15 WAY

HOUSING

DESCRIPTION:

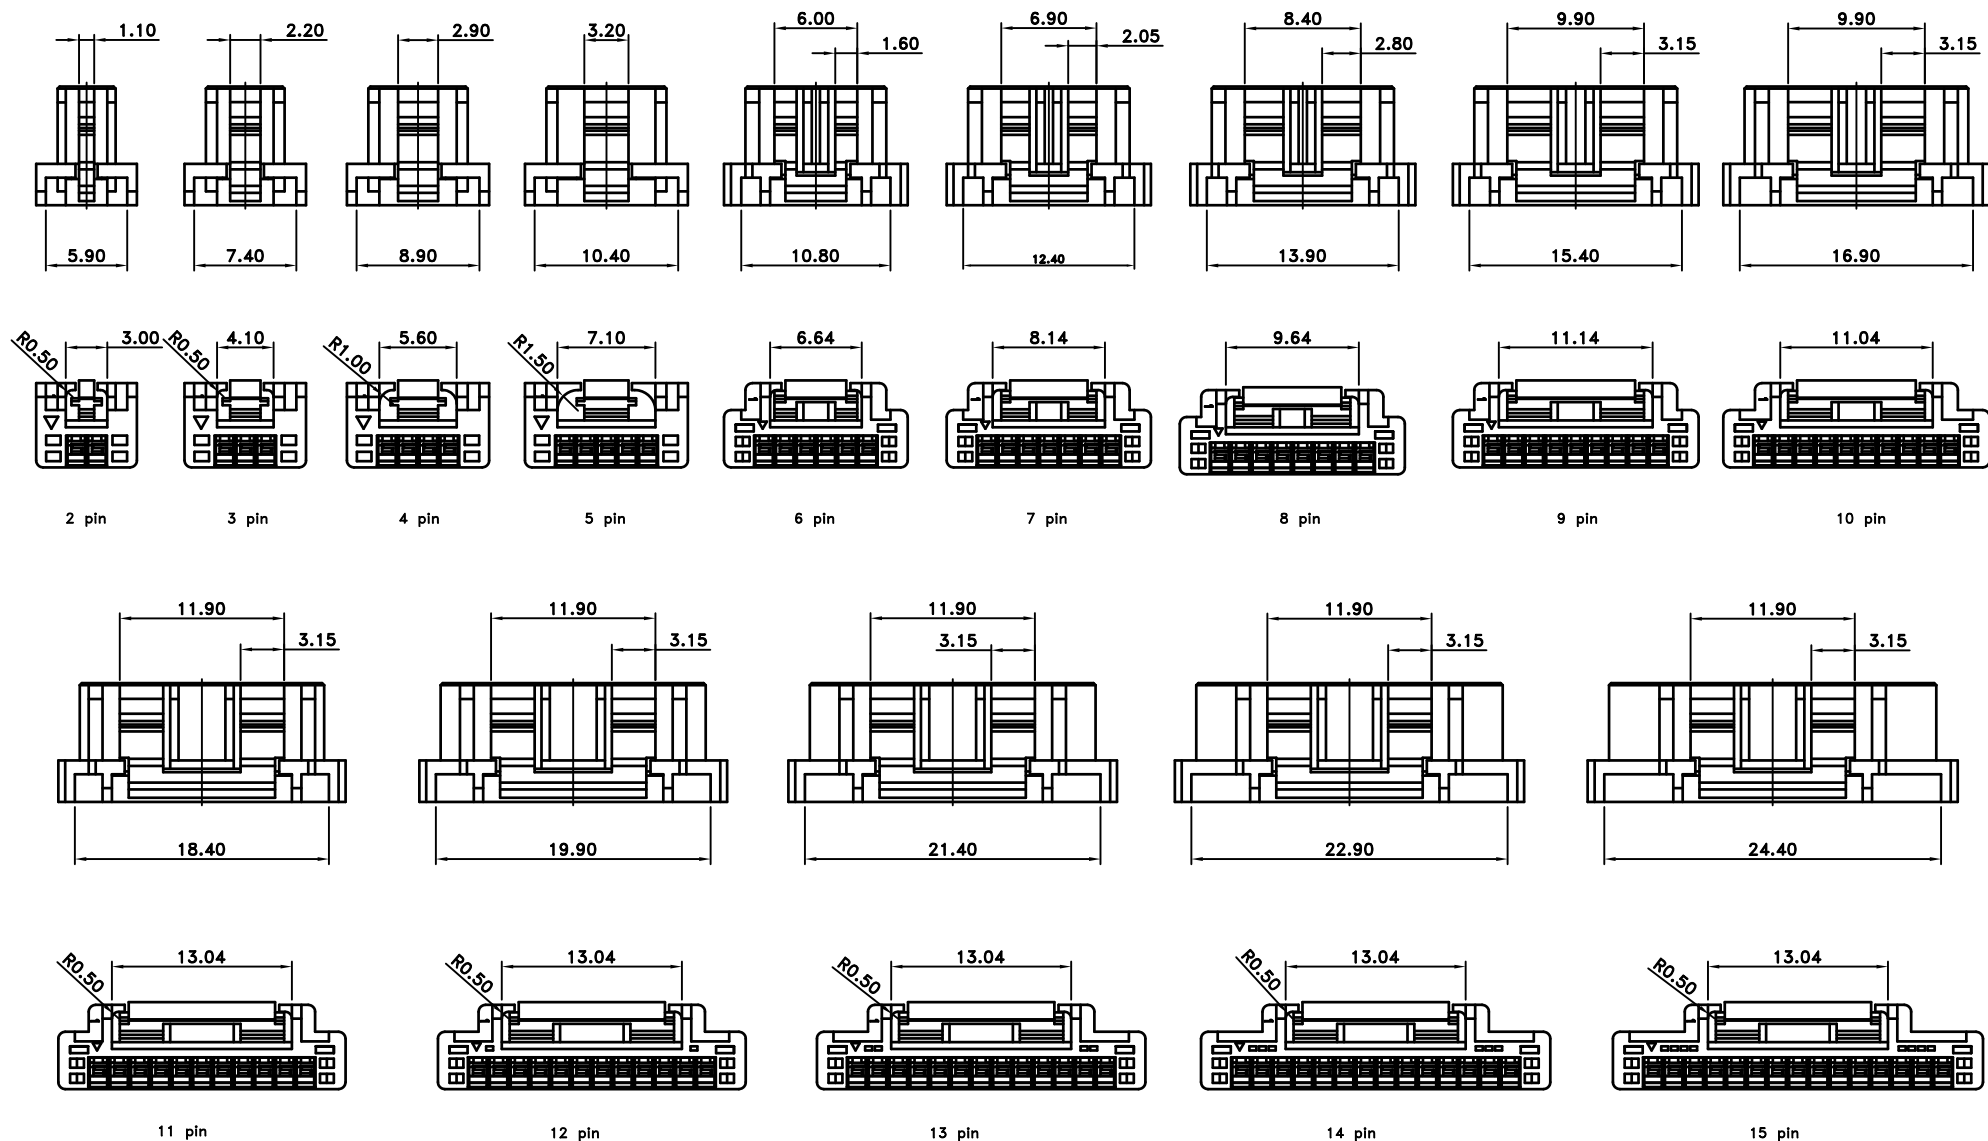

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CLM15-H-1Xxx-LF

SERIES

LEADFREE

1X02:02 WAY

1X15:15 WAY

HOUSING

DESCRIPTION: