
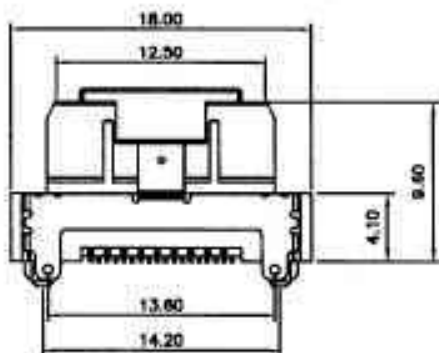
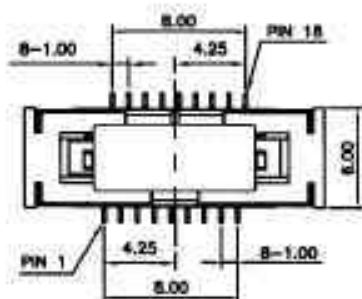



ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	PA-46	(Black)
2	CONTACT	18	Phosphor Bronze	15u Gold Plating
3	CAP	1	PA-46	COLOR: Black
4	SHIELD	2	SUS 304	Ni Plating

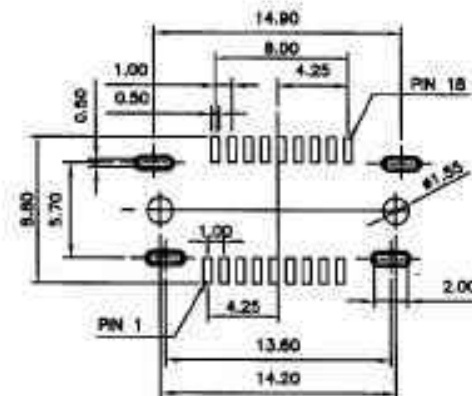

NOTES

1.MATERIAL: See drawing

2.ELECTRICAL

2.1.Insulator resistance: 1000M ohms Min. @ 250 VDC

2.2.Withstanding voltage: 100 VAC / minute

2.3.Contact resistance: 50m ohms Max.

3.MECHANICAL

3.1.Mating force: 30N(3.06kgf) Max.

3.2.Unmating force: 4.2N(0.43kgf) Min.

3.3.Durability: 10000 cycles Min.

3.4.Contact retention force: 4.2N(0.43kgf) Min

4.PACKING: 250pcs/tray (reference)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

CPMOL-PVPC-18-LF

SERIES LEADFREE

18 WAY

CAP

POST

180°SMT

MALE

DESCRIPTION: