
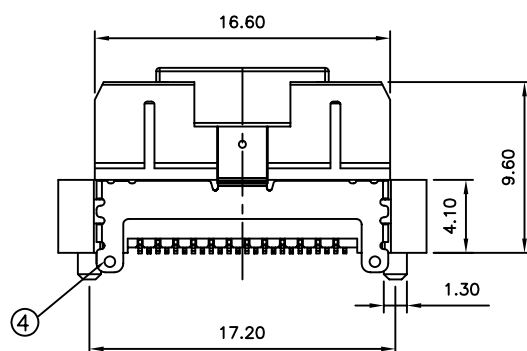
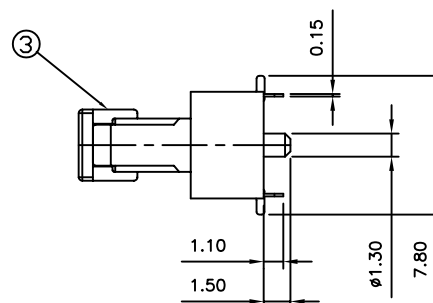
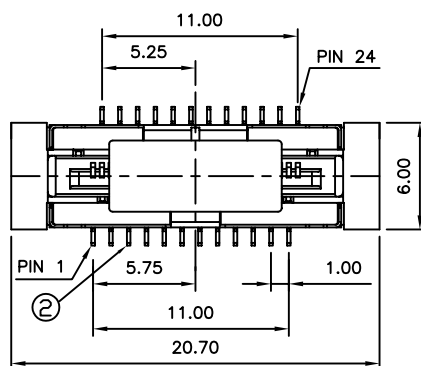
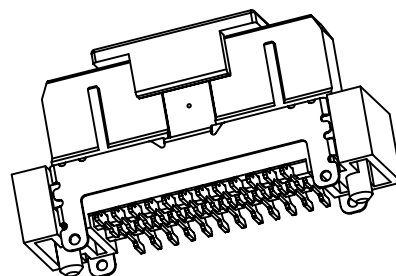
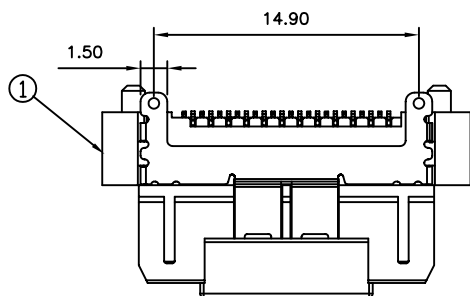


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	PA-46	BLACK
2	CONTACT	24	Phosphor Bronze	5u"GOLD, TAIL TIN PLATING
3	CAP	1	PA-46	BLACK
4	SHELL	2	SUS 304	NI PLATING

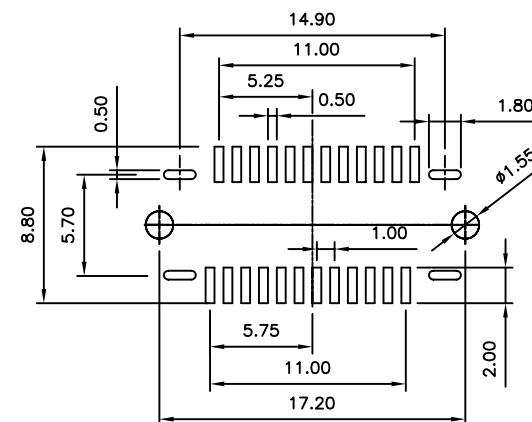

NOTES

1.MATERIAL: See drawing

2.ELECTRICAL

2.1.Insulator resistance: 1000M ohms Min. @ 250 VDC

2.2.Withstanding voltage: 250 VAC / minute

2.3.Contact resistance: 50m ohms Max.

3.MECHANICAL

3.1.Mating force: 30N(3.06kgf) Max.

3.2.Unmating force: 4.2N(0.43kgf) Min.

3.3.Durability: 10000 cycles Min.

3.4.Contact retention force: 4.2N(0.43kgf) Min

4.PACKING: 250pcs/tray (reference)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

照片框

ORDER INFORMATION

CPMOL-PVPC-24-LF

SERIES 24 WAY
CAP POST
180°SMT
MALE

DESCRIPTION: PLUG IN CONNECTOR 24 PIN CRADLE TYPE