



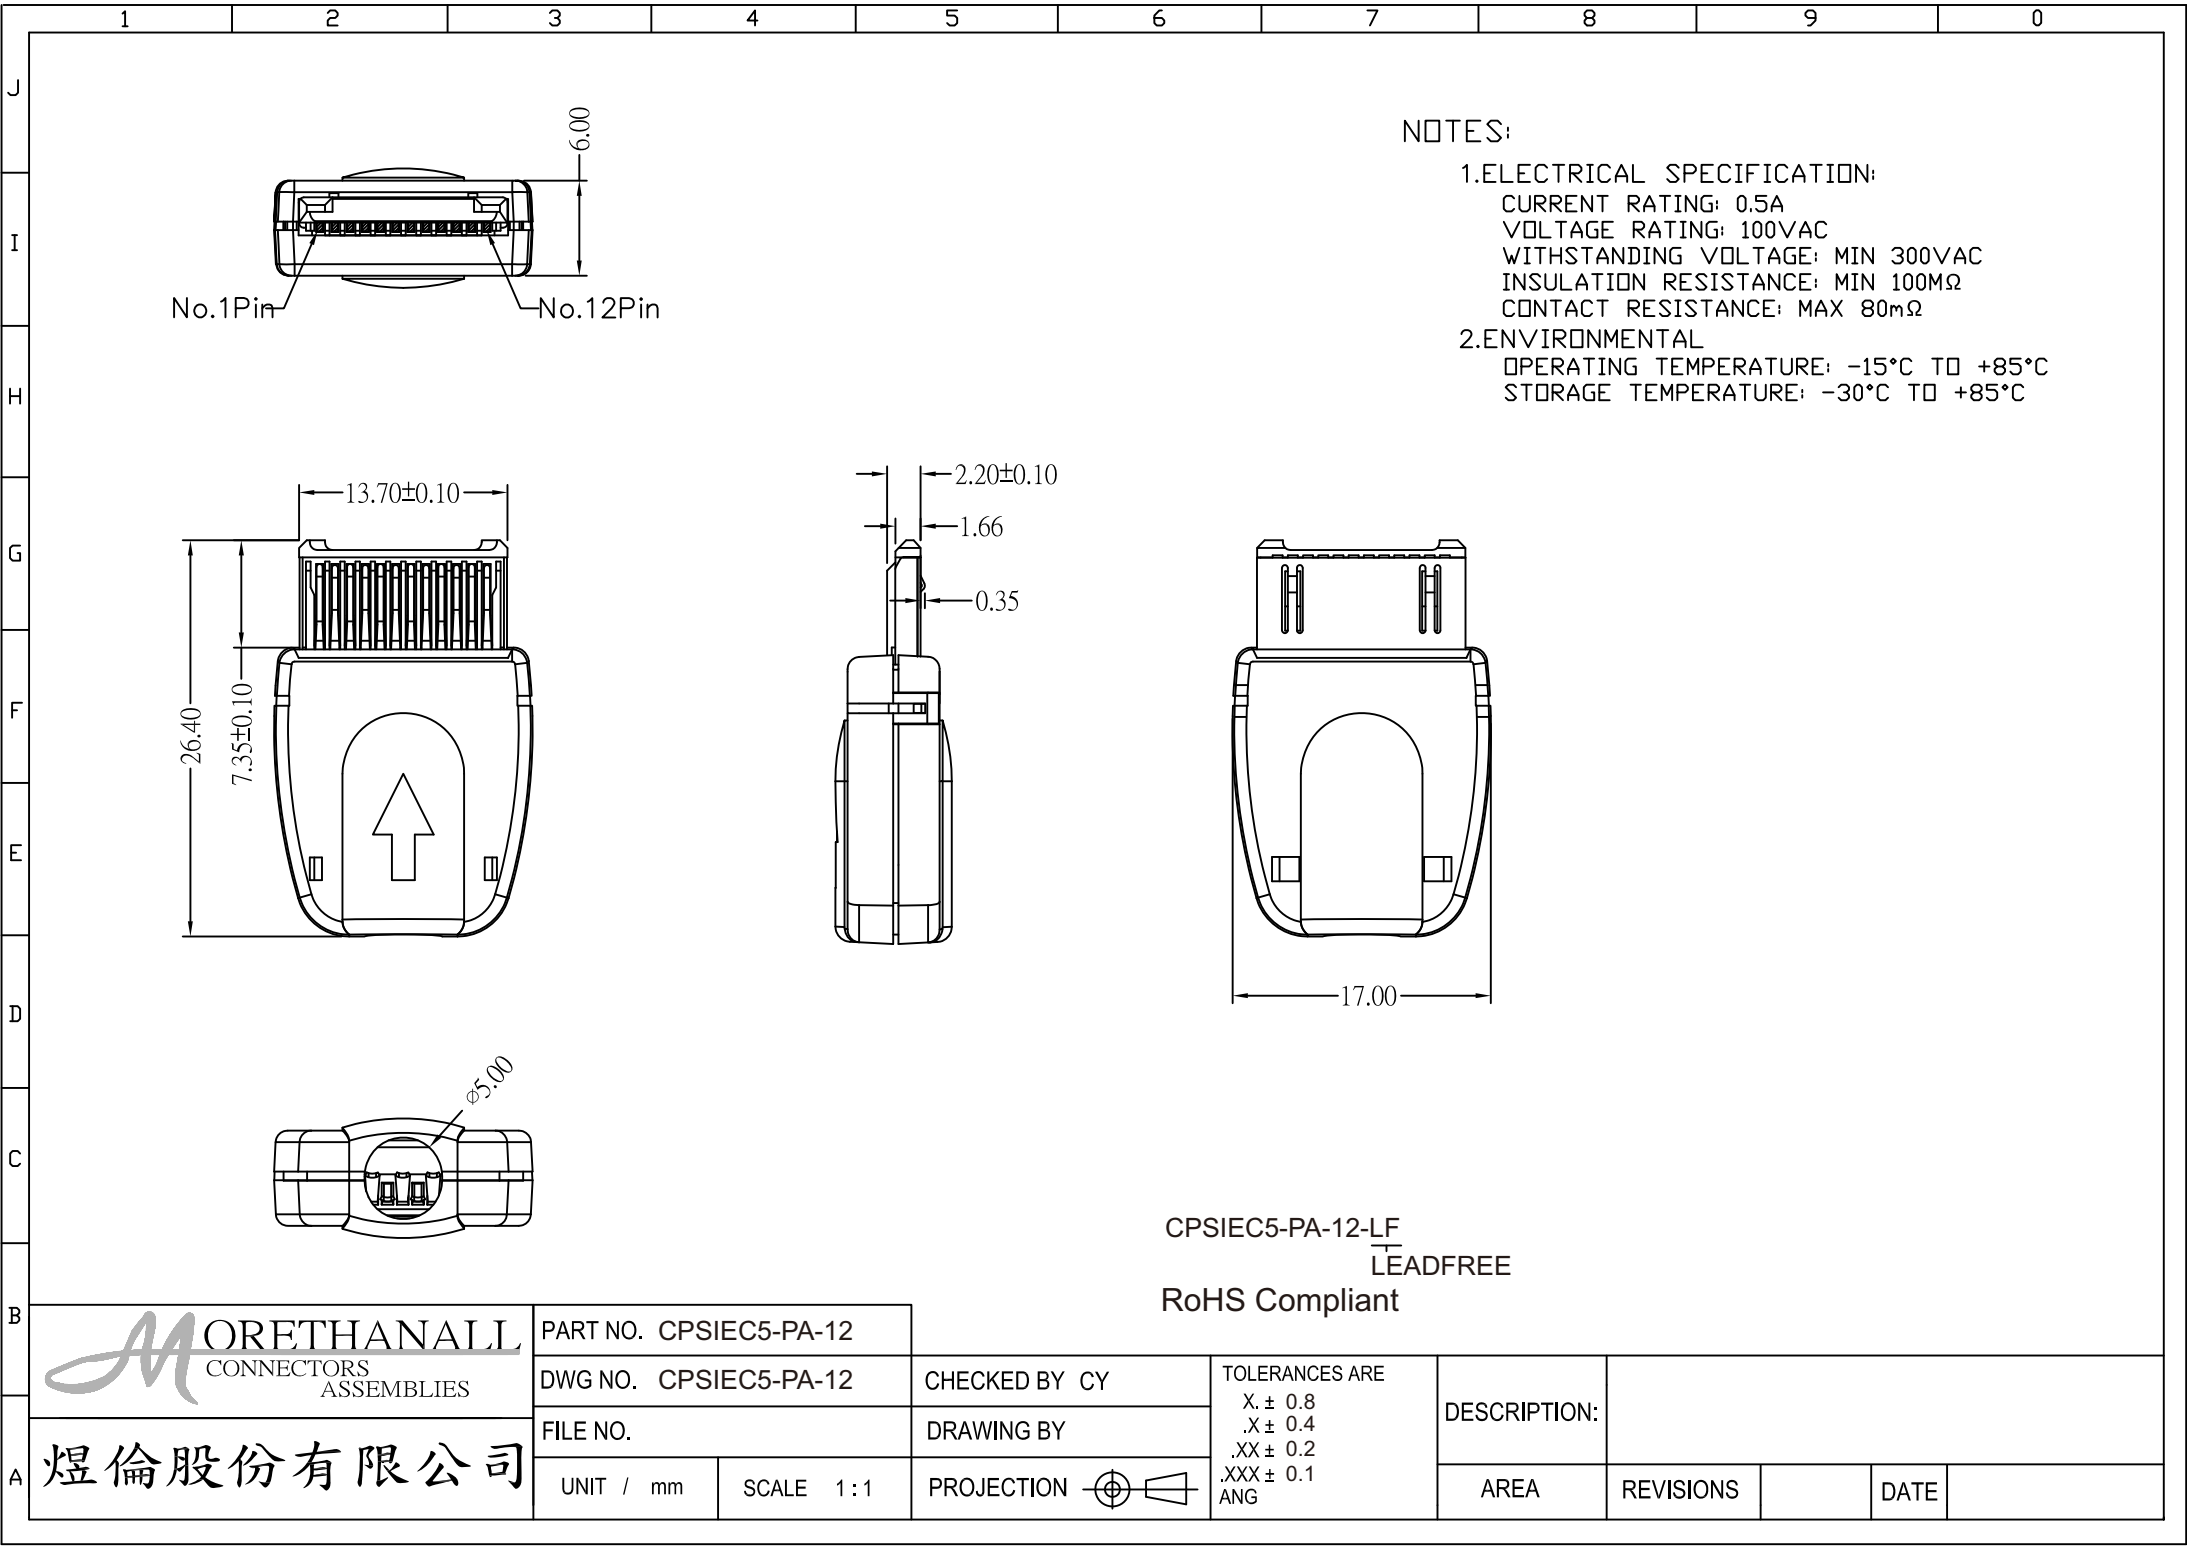





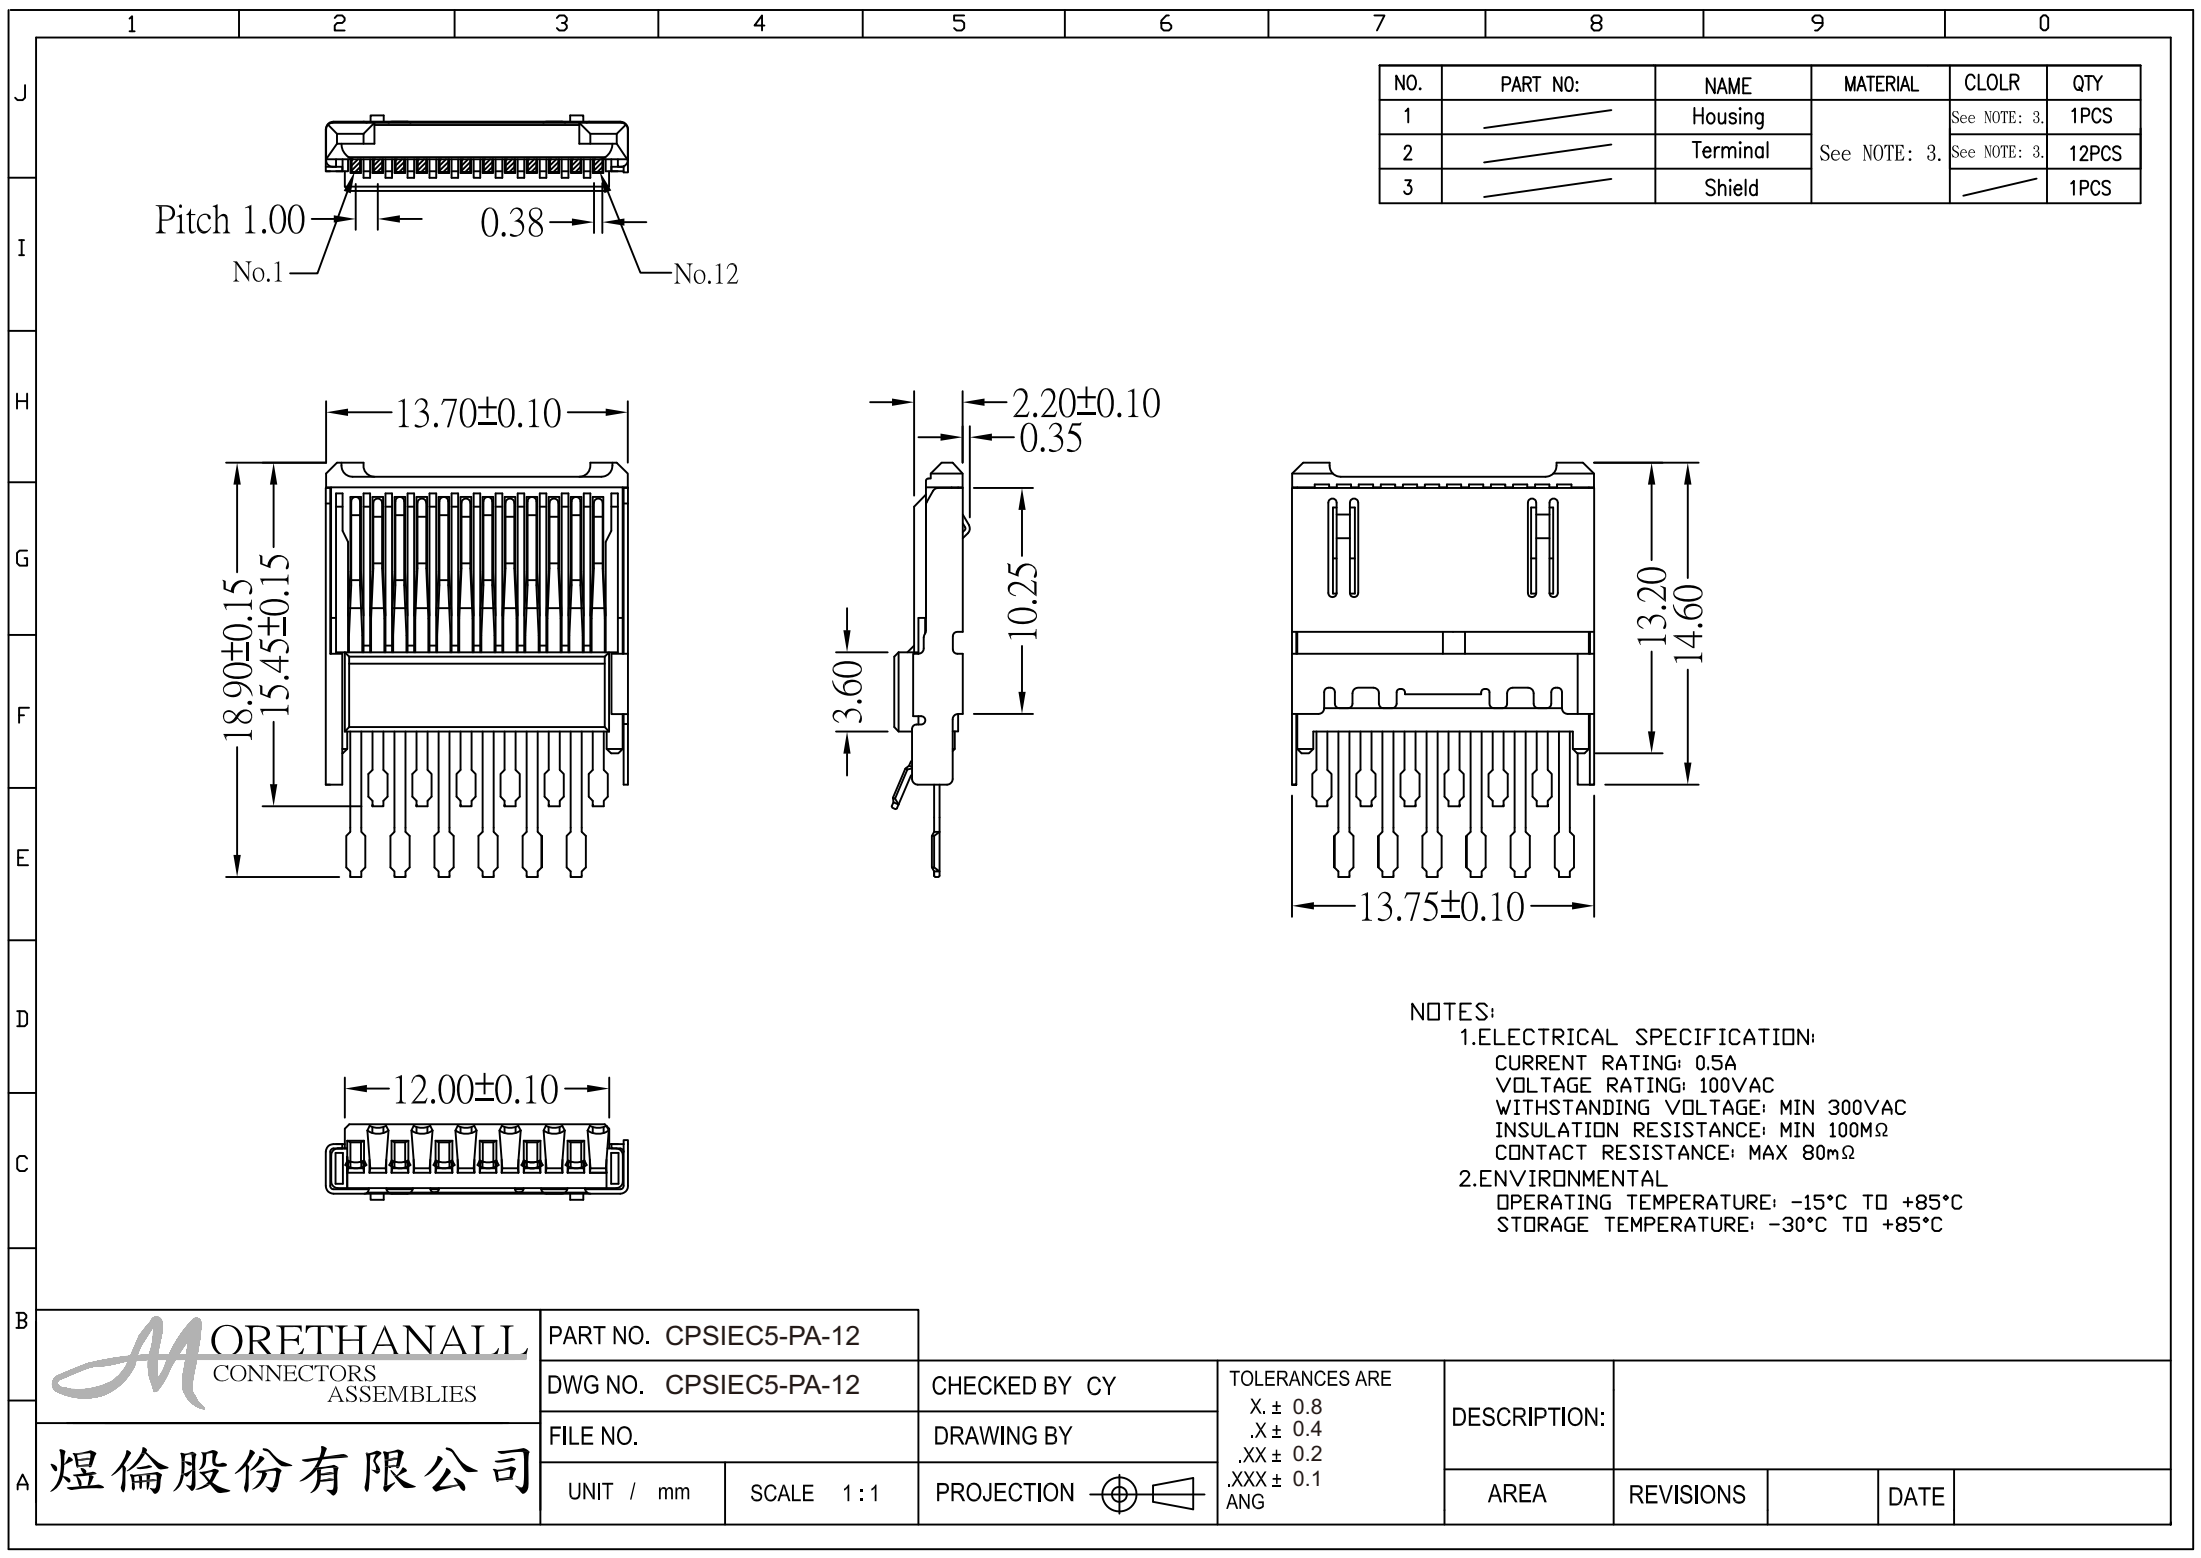


NO.	PART NO:	NAME	MATERIAL	CLOLR	QTY
1		Housing	See NOTE: 3.	See NOTE: 3.	1PCS
2		Terminal		See NOTE: 3.	12PCS
3		Shield			1PCS

NOTES:
1.ELECTRICAL SPECIFICATION:
CURRENT RATING: 0.5A
VOLTAGE RATING: 100VAC
WITHSTANDING VOLTAGE: MIN 300VAC
INSULATION RESISTANCE: MIN 100MΩ
CONTACT RESISTANCE: MAX 80mΩ
2.ENVIRONMENTAL
OPERATING TEMPERATURE: -15°C TO +85°C
STORAGE TEMPERATURE: -30°C TO +85°C

B		PART NO. CPSIEC5-PA-12								
		DWG NO. CPSIEC5-PA-12	CHECKED BY CY	TOLERANCES ARE X. ± 0.8 .X ± 0.4 .XX ± 0.2 .XXX ± 0.1 ANG	DESCRIPTION:					
A	煜倫股份有限公司	FILE NO.				DRAWING BY		AREA	REVISIONS	
		UNIT / mm	SCALE 1:1	PROJECTION 						

煜倫股份有限公司

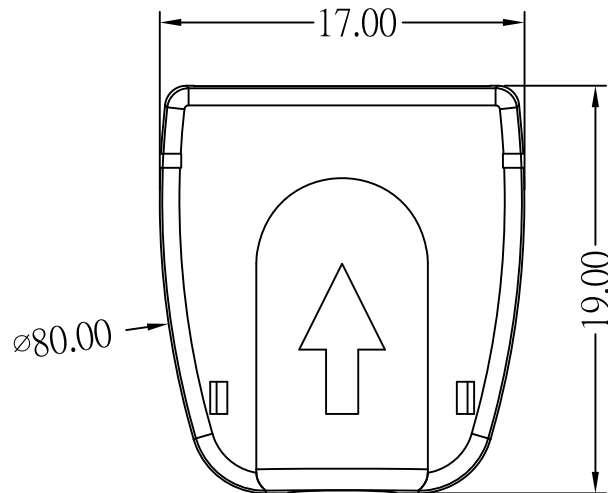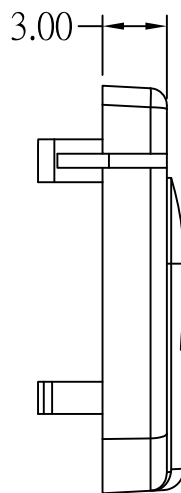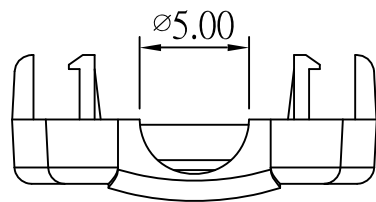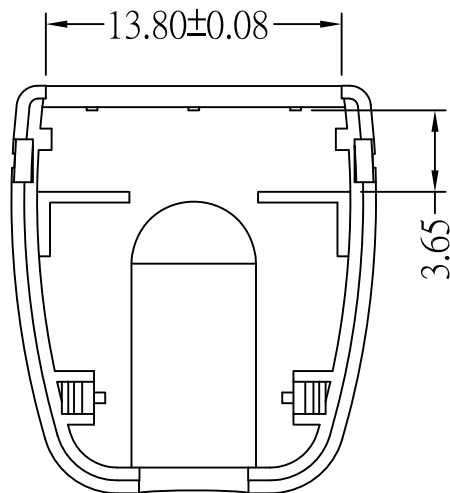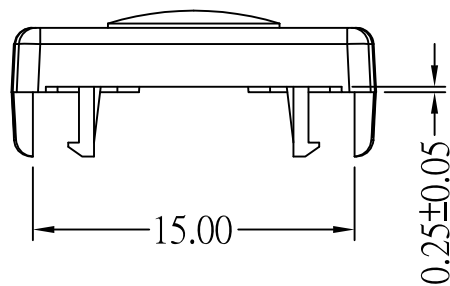

NOTES:
UPPER COVER-ABS

MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. CPSIEC5-PA-12											
	DWG NO. CPSIEC5-PA-12		CHECKED BY CY		TOLERANCES ARE X. ± 0.8 .X ± 0.4 .XX ± 0.2 .XXX ± 0.1 ANG		DESCRIPTION:					
	FILE NO.		DRAWING BY									
	UNIT / mm	SCALE 1:1	PROJECTION 		AREA		REVISIONS			DATE		

