

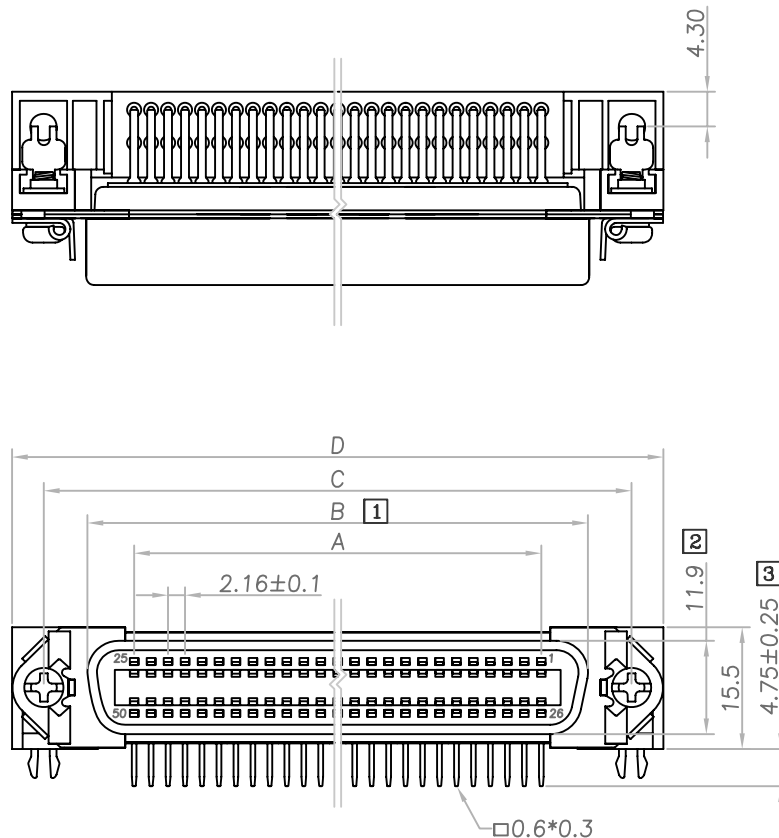




Positions	A	B	C	D
14	12.96	25.2	36.0	43.9
24	23.76	36.0	46.8	54.7
36	36.72	48.9	59.7	67.7
50	51.84	64.1	74.9	82.8

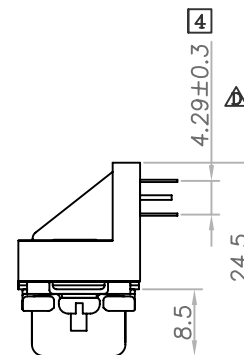

APPOSE SPRING LATCH
x2PCS

Material & Finish

SHELL:

Steel, Nickel Plated Steel

PIN CONTACT:

Phosphor Bronze

Gold Flash Plated

INSULATOR:

PBT & Glass-fibre reinforced

UL-94-V0 Blue

CURRENT RATING:

3 Amp

CONTACT RESISTANCE:

30mΩ

DIELECTRIC STRENGTH:


1000VAC for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500VDC)

TEMPERATURE:

-55°C to +105°C

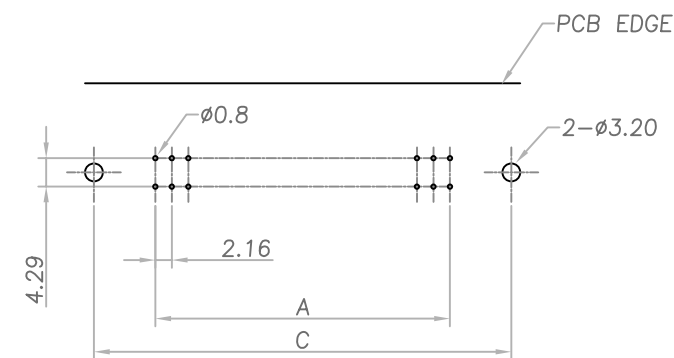

RECOMMEND PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.40
.XX ± 0.30
.XXX ± 0.20
ANG ± 3°



ORDER INFORMATION

CR-SZ-xx-LF
SERIES | LEADFREE
14-50WAY
CLIP
FEMALE

DESCRIPTION: CENTRONIC PCB RIGHT ANGLE TYPE
FEMALE SCREW LOCK Z SHAPE APPOSE SPRING LATCH