
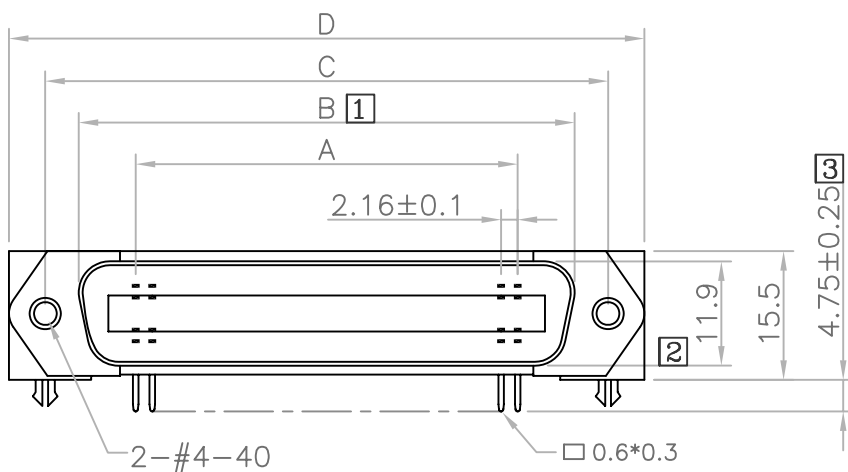
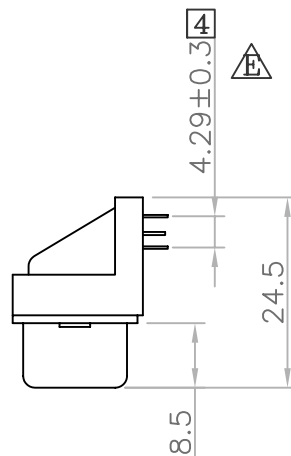
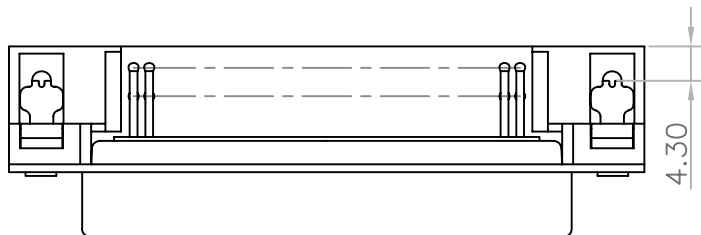


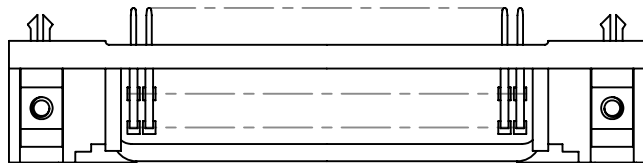

Positions	A	B	C	D
14	12.96	25.2	36.0	43.9
24	23.76	36.0	46.8	54.7
36	36.72	48.9	59.7	67.7
50	51.84	64.1	74.9	82.8

Material & Finish

SHELL:

Steel
Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor Bronze
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

NUMBER OF CONTACT:

14,24,36,50

CURRENT RATING:

1 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

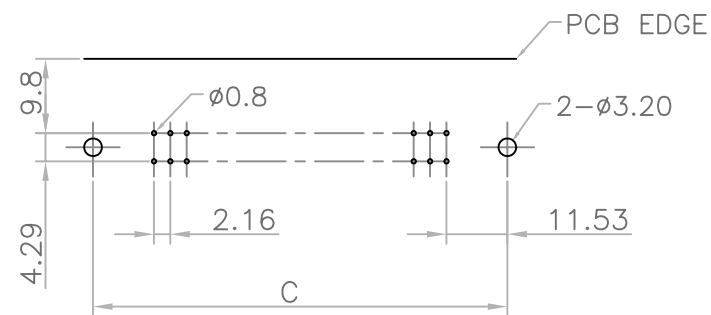

P.C.B. LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CR-SZNH-xx-LF
SERIES LEADFREE
14~50 WAY
HEX SCREW
FEMALE NUT
CLIP

DESCRIPTION: CENTRONIC P.C.B. R/A TYPE FEMALE RIVET Z SHAPE

NOTE:

1.MATERIAL: STELL



2.FLASH: NICKEL or TIN PLATED

3.L= 8.8mm

L=11.8mm

L=17.0mm

L=10.9mm

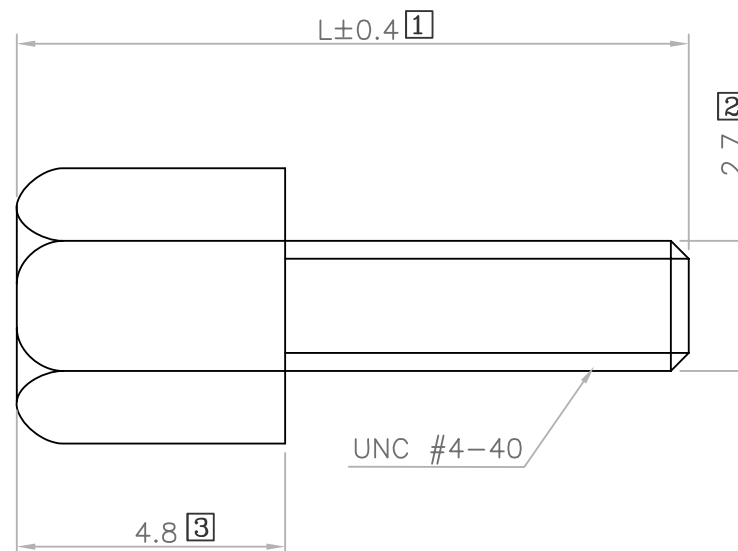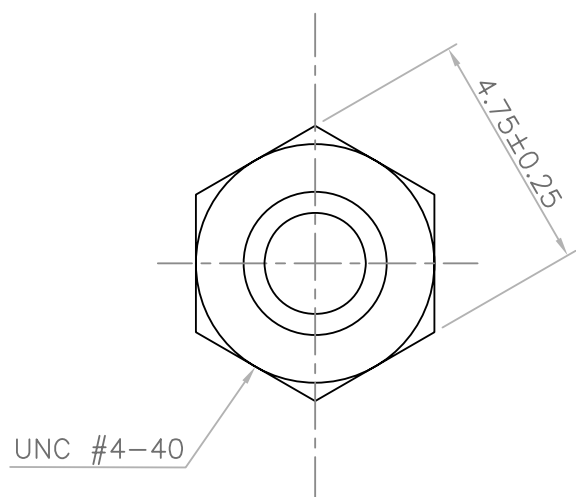

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X.±

UNIT / mm

SCALE 1:1

.XX.±

DATE

.XXX.±

ANG.±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

CR-SZNH-xx-LF
SERIES | | | LEADFREE
FEMALE | | | 14~50 WAY
NUT | | | HEX SCREW
CLIP

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: CENTRONIC P.C.B. R/A TYPE FEMALE RIVET Z SHAPE