




Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

PART NO	A±0.20	B±0.20	C±0.20	D±0.20
CS-PA-14	43.90	36.00	25.50	12.96
CS-PA-24	54.70	46.80	36.30	23.76
CS-PA-36	67.70	59.70	49.30	36.72
CS-PA-50	82.80	74.90	64.40	51.84

4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Cu:40u"min. 80~120u"Tin Plated
3	Front-shell	1	Cold Rolled Steel	T=0.45,0.50,0.60mm	Cu:40u"min. 80~120u"Nickel Plated
2	Contact	14~50	Brass	T=0.20mm	Contact area:0.8~1.2u"Gold Plated over 40u"Nickel min. Solder area:80~120u"Tin Plated over 40u"Nickel min.
1	Housing	1	P.B.T	UL 94-V0	Black/Blue/White
No.	Part Name	Q'ty	Material	Remarks & Thickness	Finish

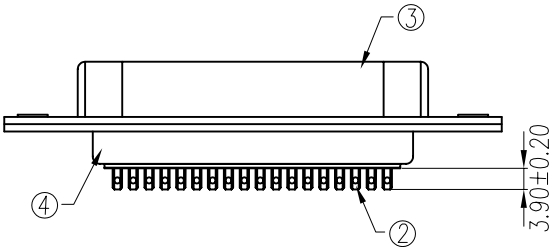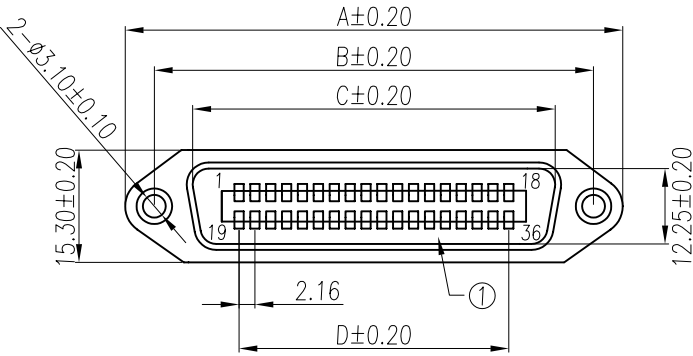

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

CS-PA-xx-LF
SERIES
LEADFREE
14~50 WAY
A TYPE
MALE

DESCRIPTION: CENTRONIC (M)SOLDER傳統梯形平邊