


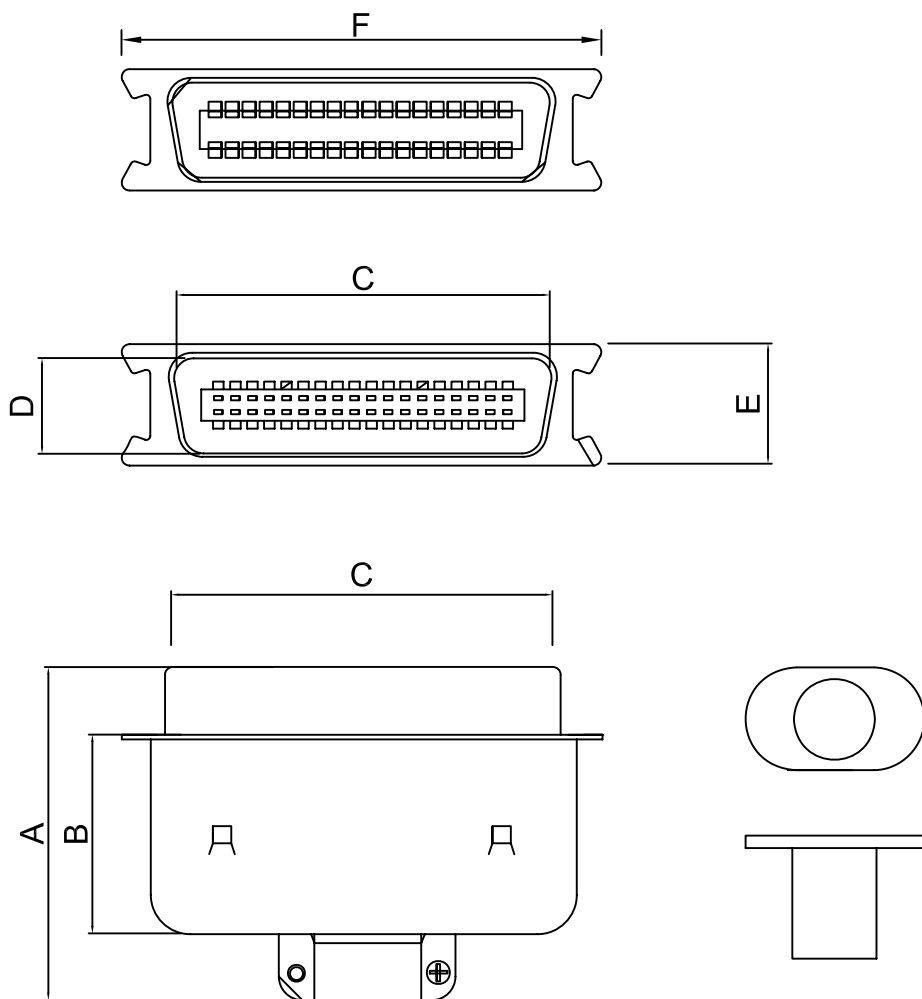

Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.25mm
- 1.3 Shell: Spcc,t=0.40mm,50P Front-shell t=0.60mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 9.0 Kg Max.
- 2.6 Total unmating force: 5.0 Kg Min.
- 2.7 Temperature range: -55°C~85°C

PART NO.	A±0.8	B±0.2	C±0.2	D±0.13	E±0.2	F±0.2
CSH-P-14	41.4	21.2	25.5	12.25	15.3	38.0
CSH-P-24	41.0	21.2	36.4	12.25	15.3	48.8
CSH-P-36	40.5	22.6	49.3	12.25	15.7	61.70
CSH-P-50	45.0	24.8	64.4	12.25	15.3	77.0

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

CSH-P-xx-LF
SERIES T LEADFREE
14~50 WAY
MALE

DESCRIPTION: CENTRONIC SOLDER MALE ASSEMBLY