

Material & Finish

SHELL:

Steel
Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor bronze or Brass
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000M Ω Min. (at 500V DC)

TEMPERATURE:

-55° C to +105° C

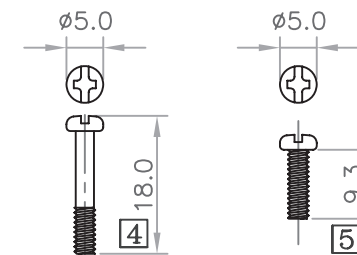

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX \pm

ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

CSL-PM-50-LF
SERIES T LEADFREE
50WAY
METAL COVER
MALE

DESCRIPTION: CENTRONIC SOLDER TYPE MALE 50PIN METAL RIGHT ANGLE COVER 簡易排針