


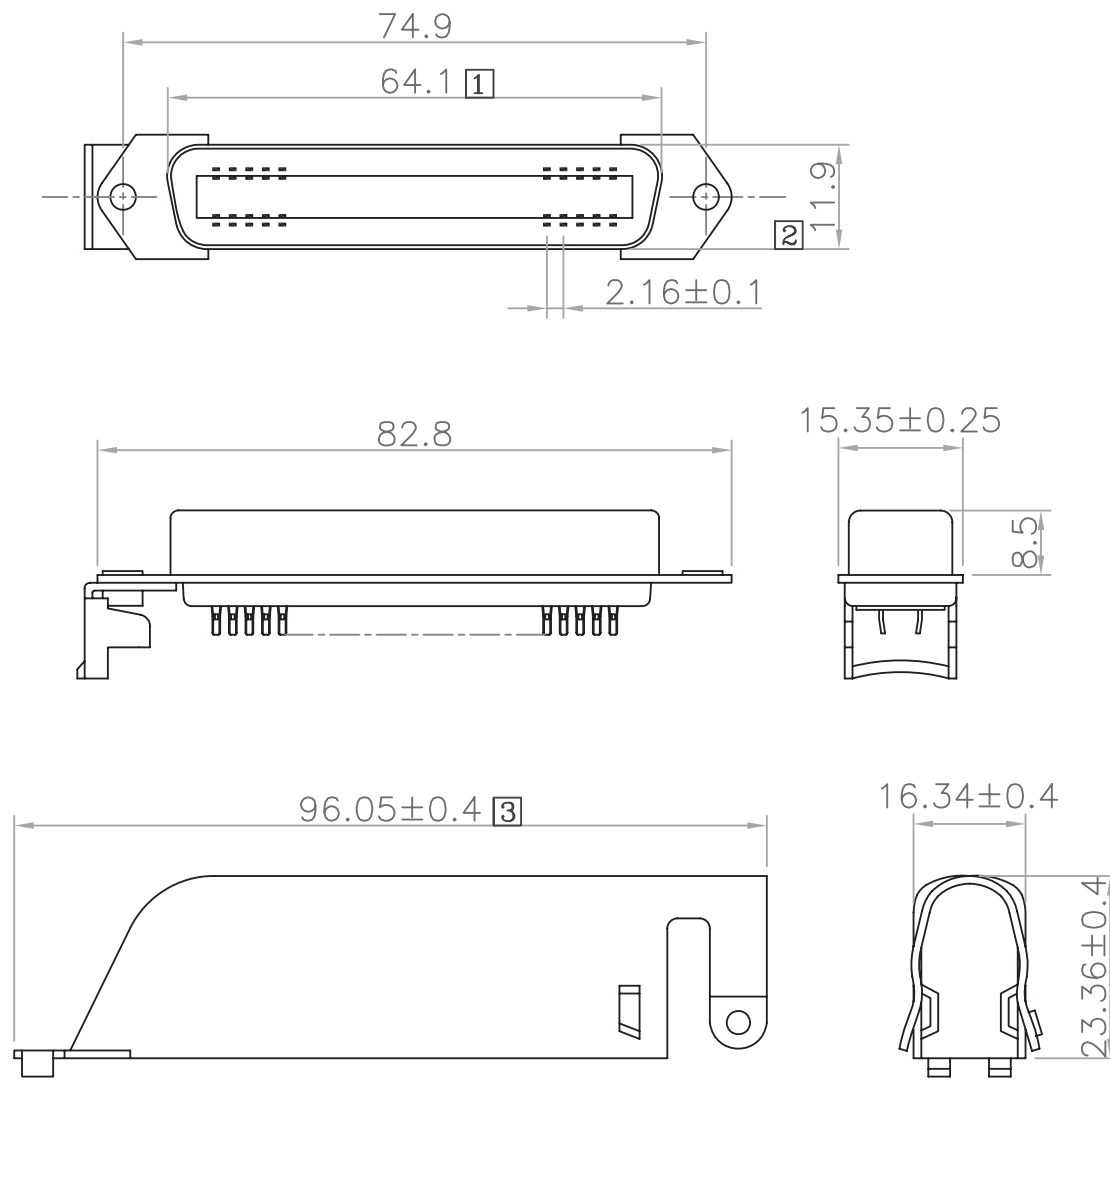

Material & Finish

SHELL:

Steel
Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor bronze or Brass
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL 94V-0

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55° C to +105° C

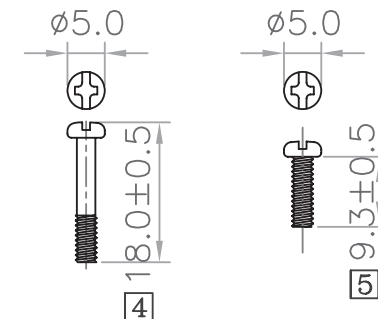

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PJECTION

照片框

ORDER INFORMATION

CSL-SM-50-LF
SERIES | LEADFREE
50WAY
METAL COVER
FEMALE

DESCRIPTION: CENTRONIC SOLDER TYPE FEMALE 50PIN METAL RIGHT ANGLE COVER