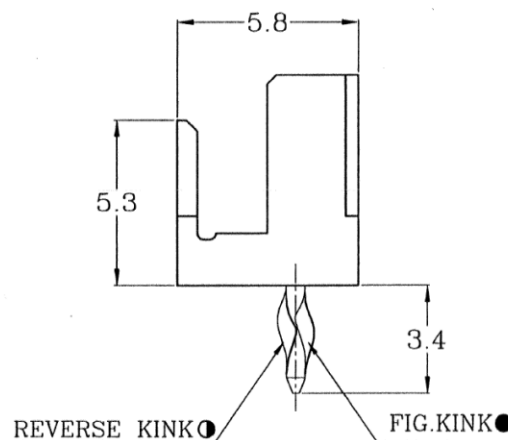
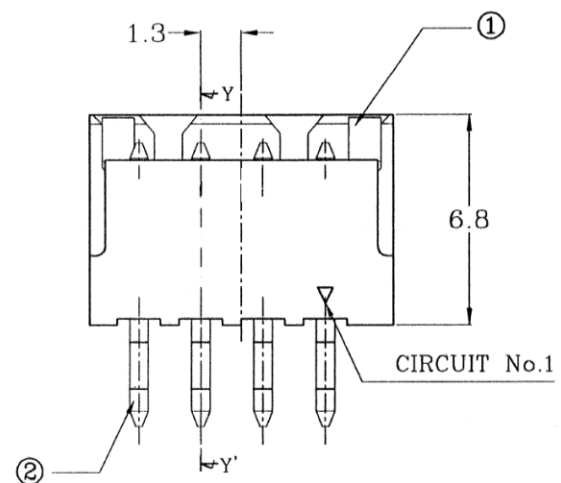
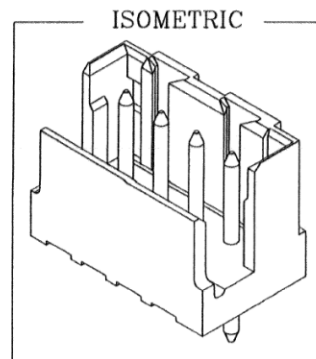
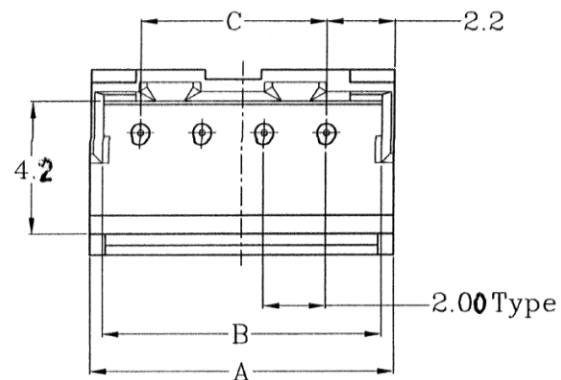


DIMENSIONS:

CIRCUITS	DIM.A	DIM.B	DIM.C
2	05.8	05.0	02.0
3	07.8	07.0	04.0
4	09.8	09.0	06.0
5	11.8	11.0	08.0
6	13.8	13.0	10.0
7	15.8	15.0	12.0
8	17.8	17.0	14.0
9	19.8	19.0	16.0
10	21.8	21.0	18.0
11	23.8	23.0	20.0
12	25.8	25.0	22.0
13	27.8	27.0	24.0
14	29.8	29.0	26.0
15	31.8	31.0	28.0

SPECIFICATION:

* MATERIAL: ① BASE: Nylon66 94V-0

② PIN ϕ 0.6 Brass, Matte Tin Plated

CURRENT RATING : 4A AC/DC

VOLTAGE RATING : 125V AC/DC

Withstand Voltage : 1000V AC/Minute

CONTACT RESISTANCE : 10m Ω MAX.

(Before environment test)

INSULATION RESISTANCE : 1000 M Ω MIN

Temperature Range : -30°C TO 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.12
.XXX $\pm$ 0.08
ANG $\pm$ 3°

照片框

ORDER INFORMATION

CT-DB-xx-LF
SERIES LEADFREE
BOX 02~15 WAY
DIP 180°

DESCRIPTION: