
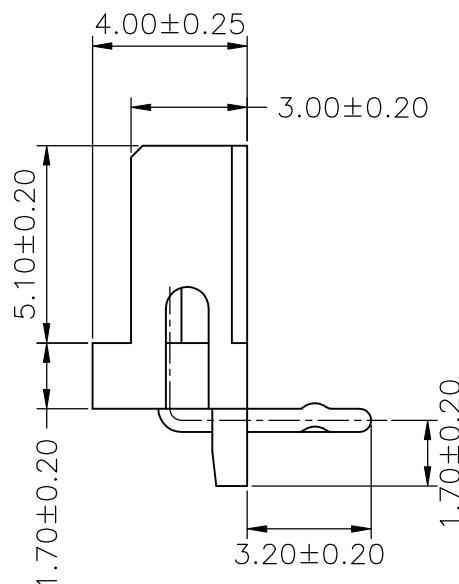
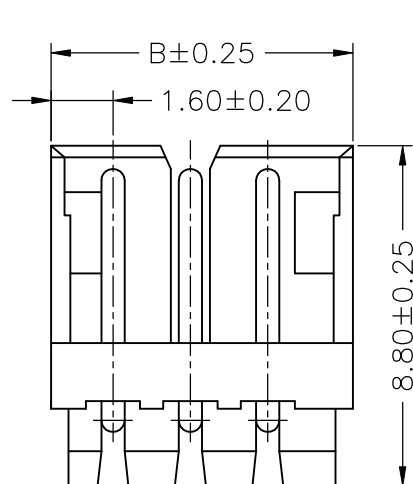
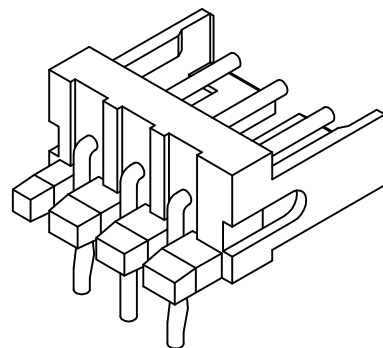



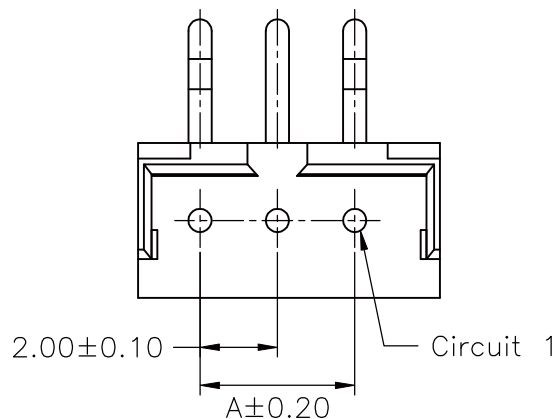

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
CT-R-02	2.00	5.96
CT-R-03	4.00	7.96
CT-R-04	6.00	9.96
CT-R-05	8.00	11.96
CT-R-06	10.00	13.96
CT-R-07	12.00	15.96
CT-R-08	14.00	17.96
CT-R-09	16.00	19.96
CT-R-10	18.00	21.96
CT-R-11	20.00	23.96
CT-R-12	22.00	25.96
CT-R-13	24.00	27.96
CT-R-14	26.00	29.96
CT-R-15	28.00	31.96

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±


.X±

.XX±

.XXX±

ANG±

PPOJECTION



ORDER INFORMATION

CT-R-xx-LF
SERIES | LEADFREE
02~15WAY
DIP 90°

DESCRIPTION: 2.00mm PITCH 180° WAFER