


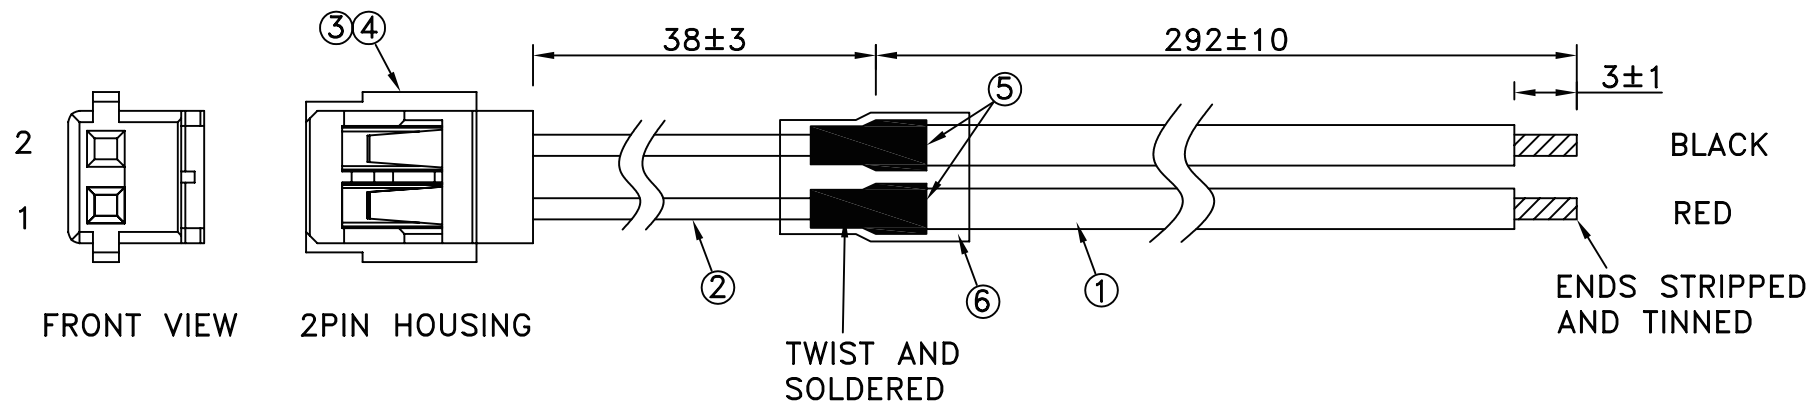


***CONSTRUCTION:

- 1.WIRE: * UL1015 24AWG OD:2.2mm RED&BLACK PVC JACKET.
2.WIRE: * UL1430 24AWG OD:1.4mm RED&BLACK PVC JACKET.

***CONNECTORS:

- 3.HOUSING: * AMP P/N:353908-2
* PITCH 1.5MM 2PIN HOUSING, WHITE NYLON66 UL94V-0 RATED.
4.TERMINAL: * AMP P/N:353907-1
* PHOSPHOR BRONZE WITH TIN PLATED.
5.SHRINK TUBE: * $\varnothing 2.5 \times 20$ mm BLACK.
6.SHRINK TUBE: * $\varnothing 5.0 \times 32$ mm TRANSPARENT.
7.TEST: * CT: 2 Ohm. IS: 5M Ohm.
8.PACKING: * PACK EACH CABLE IN A POLY BAG.
9.MATERIAL: * MATERIAL WITH RoHS GRADE.

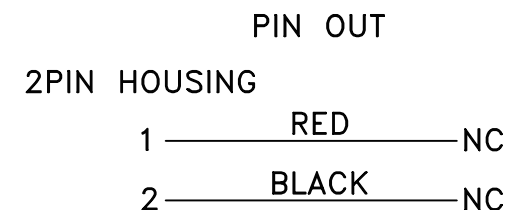

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4


TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

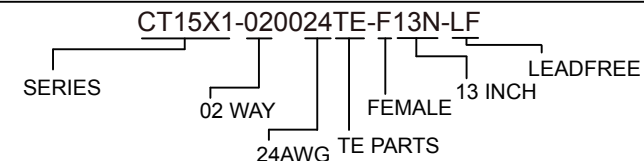

DESCRIPTION: PITCH 1.5mm 2PIN HOUSING TO OPEN