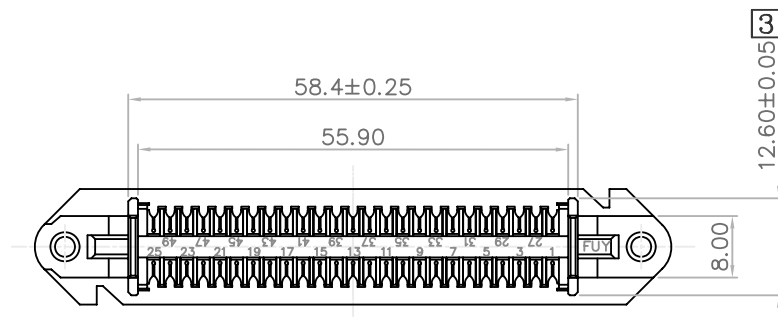
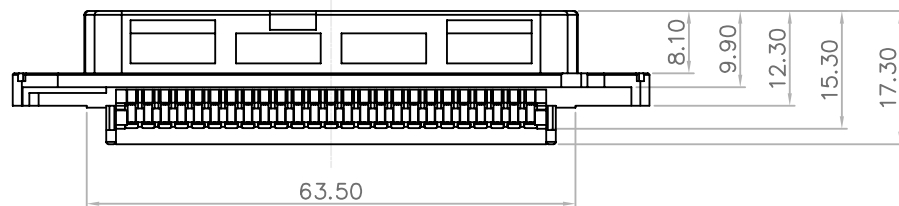
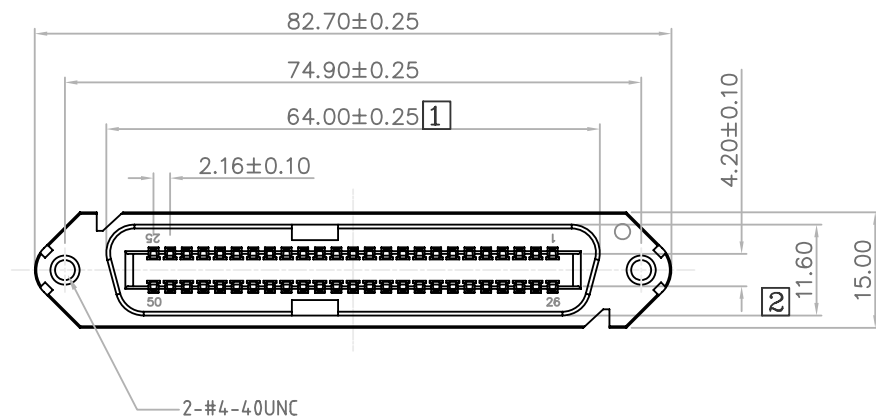


## Material & Finish

INSULATOR: PBT, BLACK





PIN CONTACT: PHOSPHOR BRONZE,  
GOLD FLASH PLATED

CURRENT RATING: 5 Amp

DIELECTRIC STRENGTH: 1000V for one minute

INSULATOR RESISTANCE: 1000MΩ Min. (at 500V DC)

TEMPERATURE: -55°C to +105°C

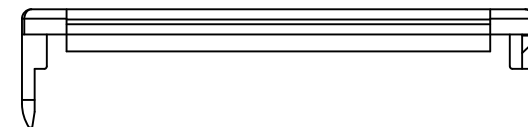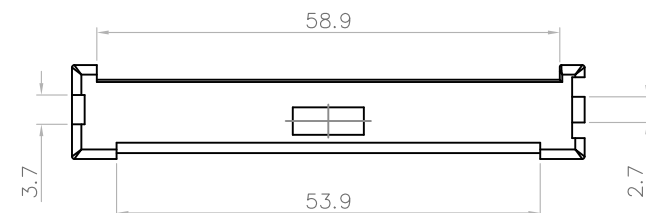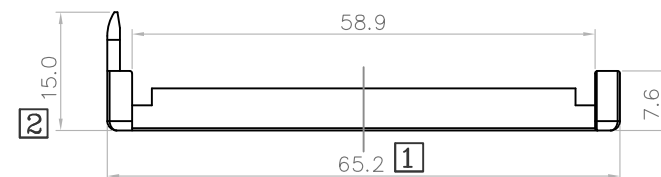

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

CTI-S-50-LF  
SERIES LEADFREE  
50 WAY  
MALE

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: CENTRONIC I.D.C. TYPE 50PIN FEMALE ALL PLASTIC