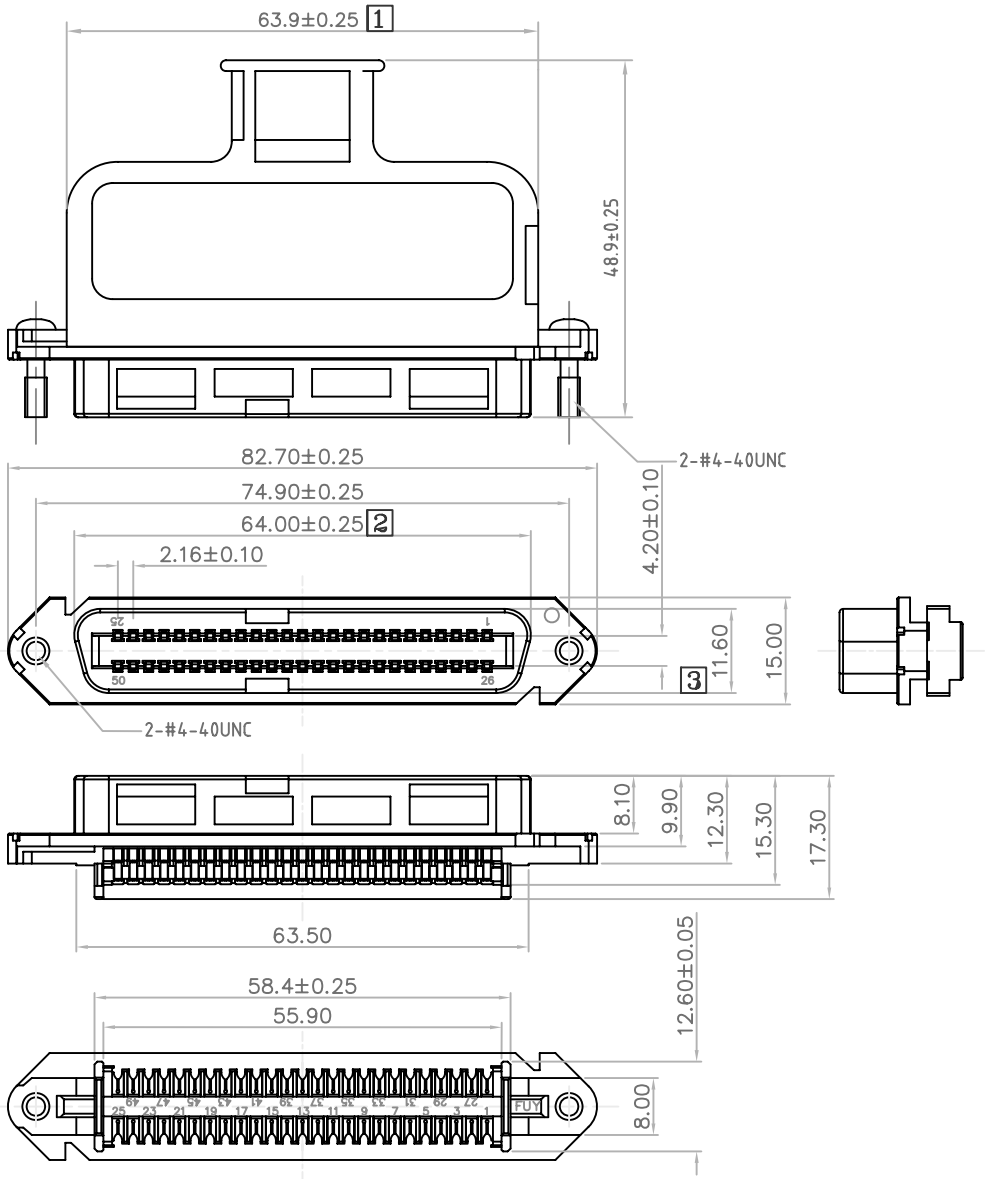



Material & Finish

SHELL:
ABS, BLACK
INSULATOR:
PBT, BLACK
PIN CONTACT:
PHOSPHOR BRONZE,
GOLD FLASH PLATED
CURRENT RATING:
5 Amp
DIELECTRIC STRENGTH:
1000V for one minute
INSULATOR RESISTANCE:
1000MΩ Min. (at 500V DC)
TEMPERATURE:
-55°C to +105°C

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	TOLERANCES ARE
CHECKED BY GENIUS	X. ± 0.40 .X ± 0.30 .XX ± 0.20 .XXX ± ANG ± 3°
UNIT / mm / SCALE 1 : 1	
DATE	
SIZE A4	PPOJECTION



ORDER INFORMATION

CTI-SK-50-LF
- SERIES
- BLACK
- FEMALE
- 50 WAY
- LEADFREE

DESCRIPTION: CENTRONIC I.D.C. TYPE FEMALE 50PIN STRAIGHT COVER ALL PLASTIC