


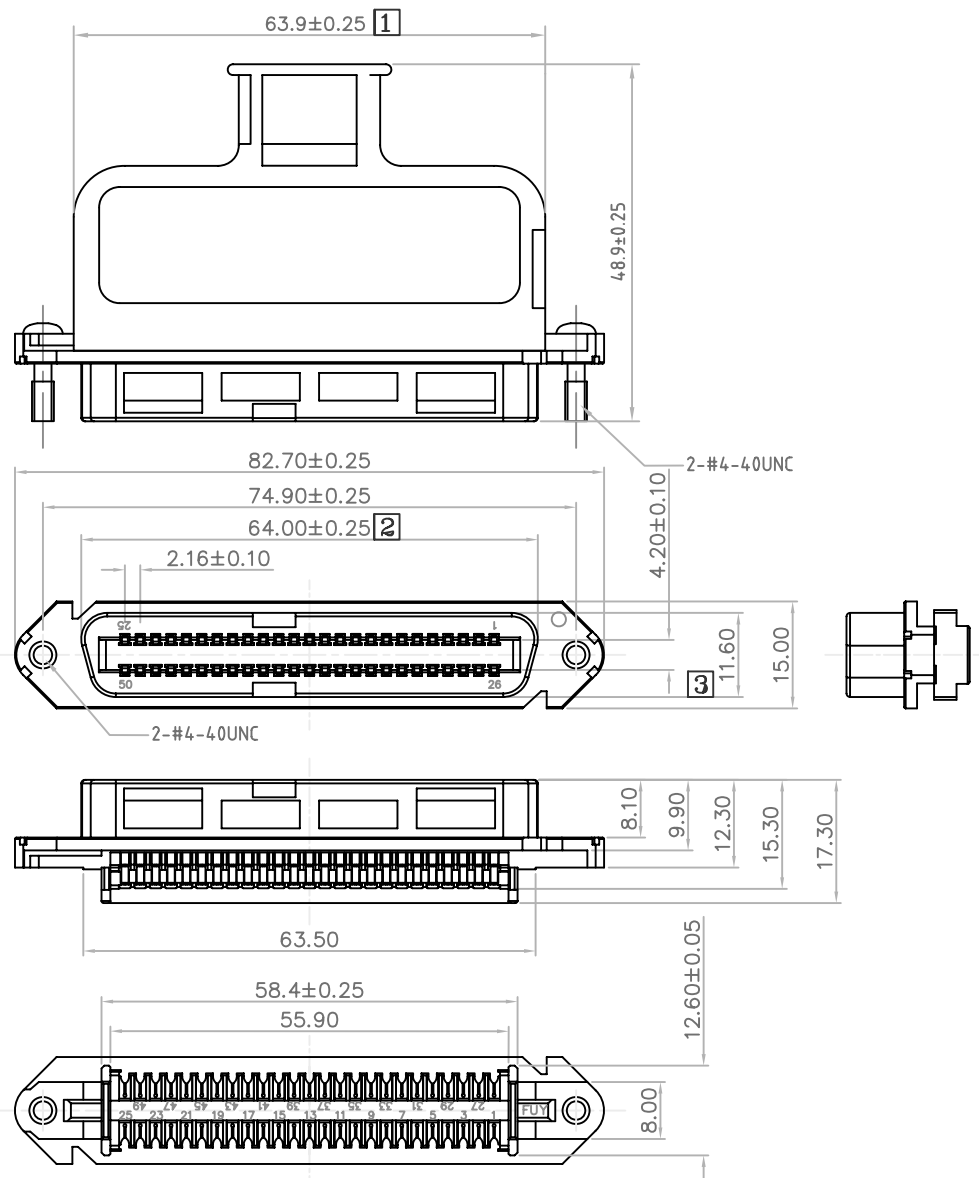

Material & Finish

SHELL:

ABS, BLACK

INSULATOR:

PBT, BLACK

PIN CONTACT:

PHOSPHOR BRONZE,

GOLD FLASH PLATED

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40


.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION



ORDER INFORMATION

CTI-SK-50-LF

SERIES | LEADFREE
50 WAY
BLACK
FEMALE

DESCRIPTION: CENTRONIC I.D.C. TYPE FEMALE 50PIN STRAIGHT COVER ALL PLASTIC