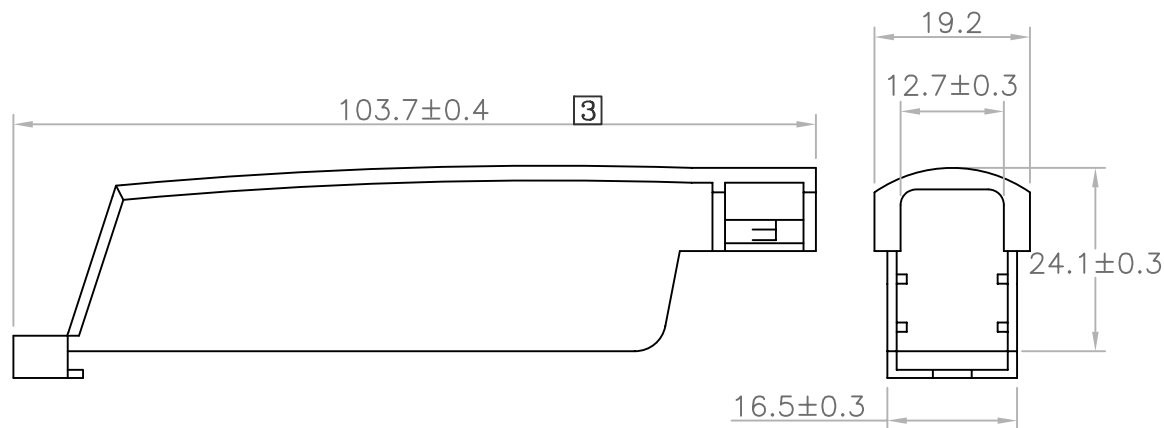

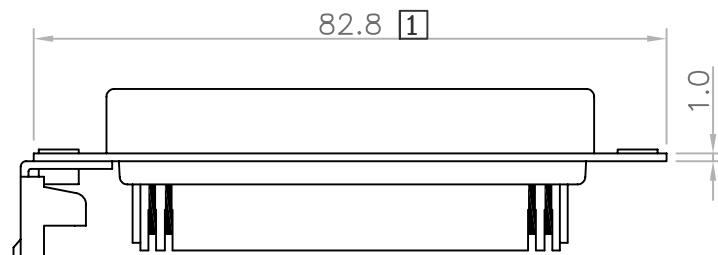
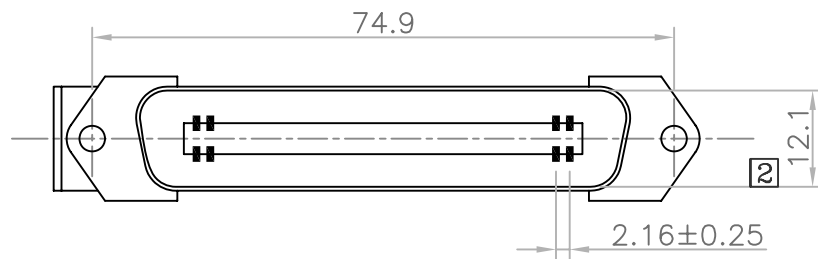


Material & Finish

SHELL:

Steel

Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor bronze or Brass
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

NUMBER OF CONTACT:

36,50

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:

1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

CTL-PKFM-50-LF
SERIES T T T LEADFREE
50 WAY
FULL METAL
BLACK
MALE

DESCRIPTION: