


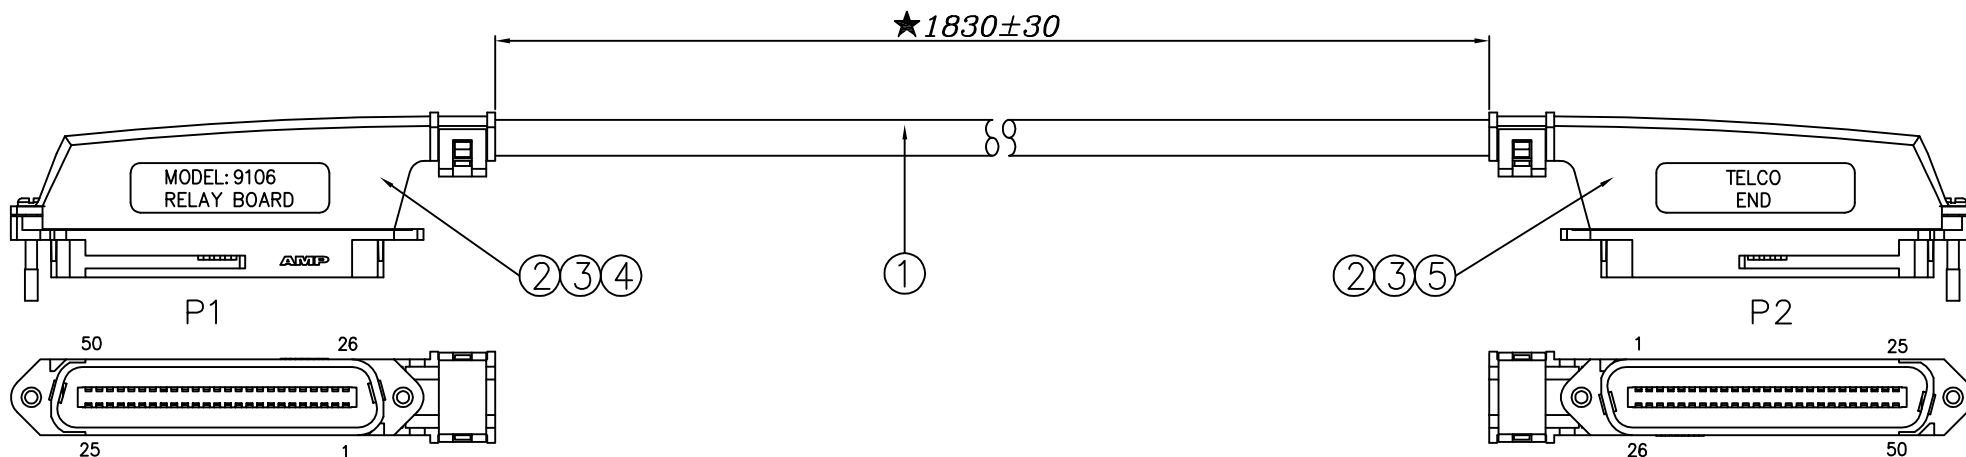

ELECTRONIC TEST:

- 1.VOLTAGE:DC 300V/5M/10ms
- 2.CONTACT RESISTANCE:5.0ohm(MAX)
- 3.100% OPEN & SHORT
- 4.未注公差±0.2mm

MEET ROHS & LEAD FREE

6	1/2000	PLUG 50P BLACK SLOT C/LOK 组装式	测试头
5	1	CABEL:L?xW?mm,印字内容“TELCO END”	MEET ROHS & LEAD FREE
4	1	CABEL:L?xW?mm,印字内容“MODEL: 9106 RELAY BOARD”	MEET ROHS & LEAD FREE
3	2	螺丝: 5.4*20.65MM 3/4 4-40 SCREW	MEET ROHS & LEAD FREE
2	2set	CR PLUG 50P BLACK SLOT C/LOK 组装式	MEET ROHS & LEAD FREE
1	1	CABLE:UL2464 24AWG*25P+AL BLACK OD:14.5mm L=2000mm	MEET ROHS & LEAD FREE
ITEM	Q'TY	DESCRIPTION	

接线图

P1	COLOR	P2
1	WHI/BLU	1
2	BLU/WHI	2
3	WHI/ORG	3
4	ORG/WHI	4
5	WHI/GRN	5
6	GRN/WHI	6
7	WHI/BRN	7
8	BRN/WHI	8
9	WHI/Slate	9
10	Slate/WHI	10
11	RED/BLU	11
12	BLU/RED	12
13	RED/ORG	13
14	ORG/RED	14

接线图

P1	COLOR	P2
15	RED/GRN	15
16	GRN/RED	16
17	RED/BRN	17
18	BRN/RED	18
19	RED/Slate	19
20	Slate/RED	20
21	BLK/BLU	21
22	BLU/BLK	22
23	BLK/ORG	23
24	ORG/BLK	24
25	VIO/Slate	25
26	BLK/GRN	26
27	GRN/BLK	27

接线图

P1	COLOR	P2
28	BLK/BRN	28
29	BRN/BLK	29
30	BLK/Slate	30
31	Slate/BLK	31
32	YEL/BLU	32
33	BLU/YEL	33
34	YEL/ORG	34
35	ORG/YEL	35
36	YEL/GRN	36
37	GRN/YEL	37
38	YEL/BRN	38
39	BRN/YEL	39
40	YEL/Slate	40
41	Slate/YEL	41

接线图

P1	COLOR	P2
42	VIO/BLU	42
43	BLU/VIO	43
44	VIO/ORG	44
45	ORG/VIO	45
46	VIO/GRN	46
47	GRN/VIO	47
48	VIO/BRN	48
49	BRN/VIO	49

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1:1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

CTLX2-5050BK24-M6F-LF

SERIES

LEADFREE

1830 mm

MALE TO MALE

24 AWG

BLACK

50 TO 50 PIN

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com