

Specifications
rating :

250V AC 5A MAX

contact resistance :


pins-30mΩ MAX; shell-50mΩ MAX

insulation resistance :

MIN 100 MEGΩ @500V DC

Protection Degree : IP40

Cable Outlet : 3~6mm

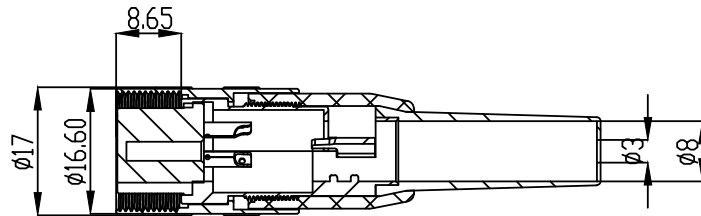

SECTION A-A

TABLE A

DAMS-JA-03	DAMS-JA-04	DAMS-JA-05	DAMS-JA-05B	DAMS-JA-06	DAMS-JA-07	DAMS-JA-08

No.	Description	Material	Treat	Q'ty
1	Housing Holder up	Zn Alloy	Nickel Ptd.	1
2	HousingHolder dn	Zn Alloy	Nickel Ptd.	1
3	Screw Cap	Brass	Nickel Ptd.	1
4	Strain Relief	TPR		1
5	Shell	PA6		1
6	Cable Holder	Steel	Nickel Ptd.	1
7	Screw	Steel	Nickel Ptd.	2
8	Housing	PA66		1
9	Terminals	Brass	Au / Sn	AS 'TABLE A'

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

DAMS-JA-xx-LF

SERIES | LEADFREE
| 03-08 WAY
ASSEMBLY
JACK

DESCRIPTION: M16 IP40 FEMALE CABLE CONNECTOR SCREW LOCKING