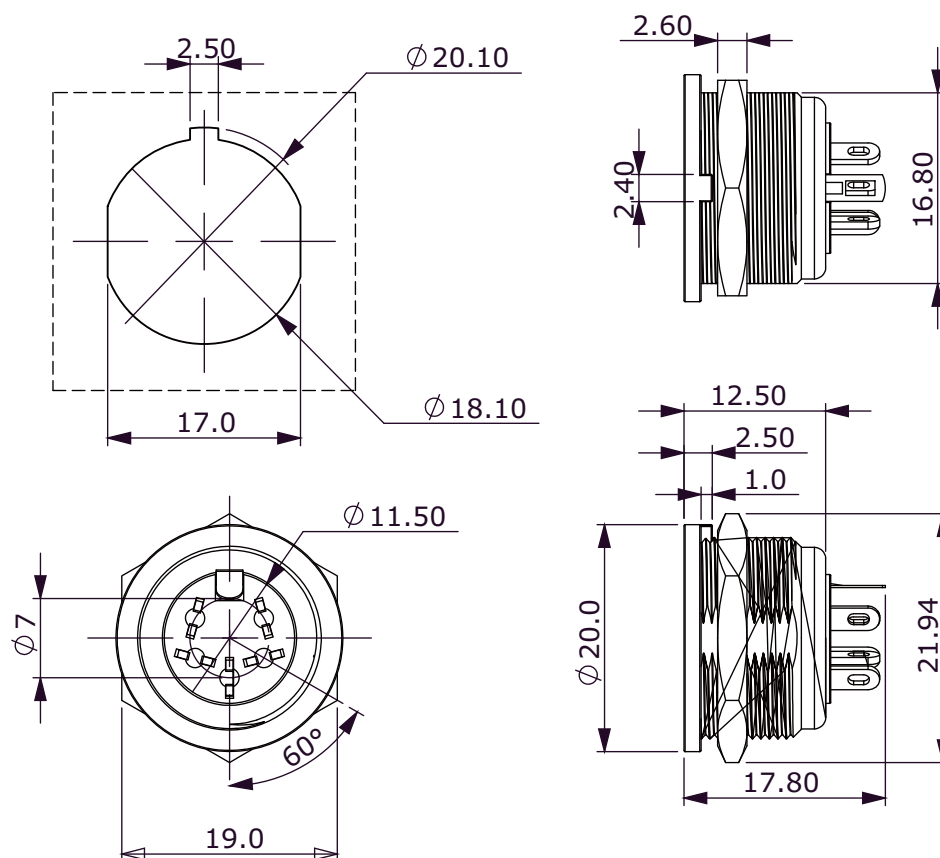


Specifications

rating :
100V AC 4A MAX
contact resistance :
pins-30mΩ MAX; shell-50mΩ MAX
insulation resistance :
MIN 100 MEGΩ @500V DC
voltage withstand :
250V AC R.M.S. for 1 minute

5	TERMINALS	Brass	Silver Ptd.	5
4	5P 240 HOUSING	PA66		1
3	SCREW NUT	Brass	Nickel Ptd.	1
2	NEGATIVE CONTACT	Copper	Nickel Ptd.	1
1	COVER	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DAMS-JS-05B-LF

SERIES

LEADFREE

05 WAY B TYPE

SOLDER

JACK

DESCRIPTION: DIN 5P240 SCREW LOCKING SOCKET PANEL MOUNT