



SECTION A-A

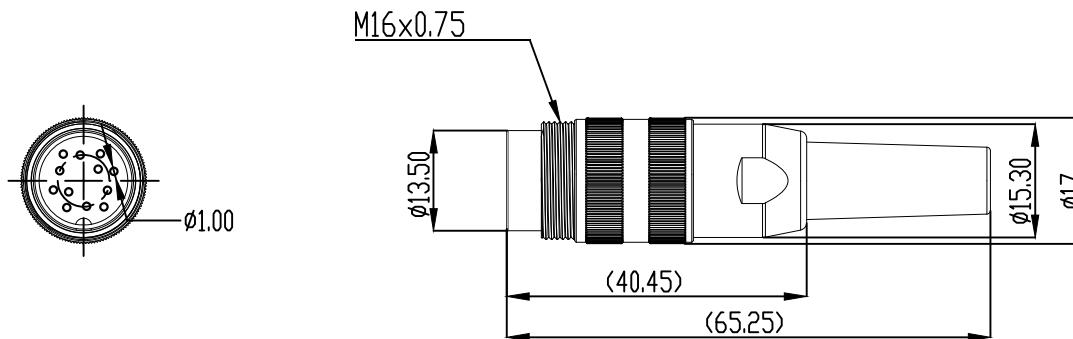

No.	Description	Material	Treat	Q'ty
1	Housing Holder up	Zn Alloy	Nickel Ptd.	1
2	HousingHolder dn	Zn Alloy	Nickel Ptd.	1
3	Screw Cap	Brass	Nickel Ptd.	1
4	Strain Relief	TPR		1
5	Shell	PA6		1
6	Cable Holder	Steel	Nickel Ptd.	1
7	Screw	Steel	Nickel Ptd.	2
8	Housing	PA66		1
9	Terminals	Brass	Gold Ptd.	12

Specifications
rating :

60V AC 3A MAX

contact resistance :

pins-30mΩ MAX; shell-50mΩ MAX

insulation resistance :

MIN 100 MEGΩ @500V DC

Protection Degree : IP40

Cable Outlet : 3~6mm/6~8mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DAMS-PA-12-LF

SERIES T LEADFREE
12WAY
ASSEMBLY
MALE

DESCRIPTION: