
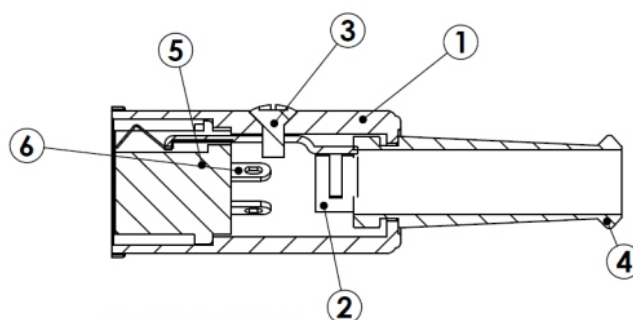

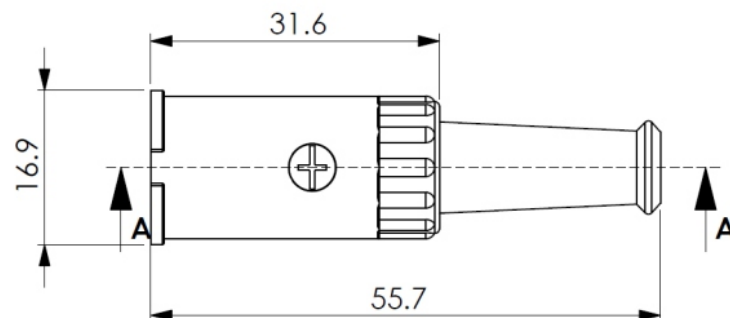


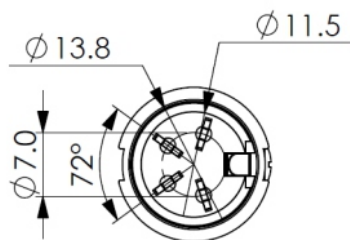

DASM-JA-04-LF
LEADFREE
RoHS Compliant

A-A SECTION

6	Contact Terminals	Brass	Silver Ptd.	4
5	4P Housing	PA66		1
4	Strain Boot	PVC		1
3	Setscrew	Steel	Nickel Ptd.	1
2	"T" Cable Holder	Steel	Nickel Ptd.	1
1	Shell Cover	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

Specifications
rating :

100V AC 1A MAX

contact resistance :

pins-30mΩ MAX; shell-50mΩ MAX

insulation resistance :

MIN 100 MEGΩ @500V DC

voltage withstand :

250V AC R.M.S. for 1 minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DASM-JA-04-LF

SERIES | LEADFREE
04 WAY
ASSEMBLY
FEMALE

DESCRIPTION: