

Specifications

Rating:100V AC 4A MAX

Contact resistance:




pins-30m ohm MAX;shell-50m ohm MAX

Insulation resistance:

MIN 100 MEG OHM @500V DC

Voltage withstand:

250V AC R.M.S for 1 minute

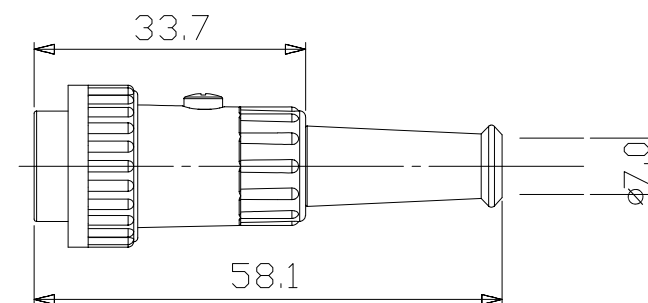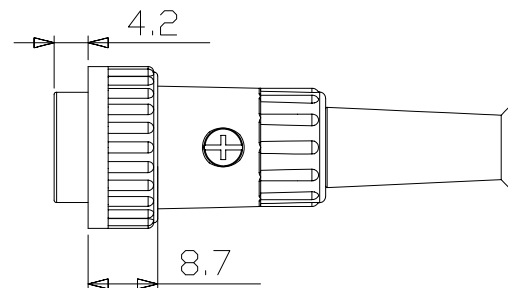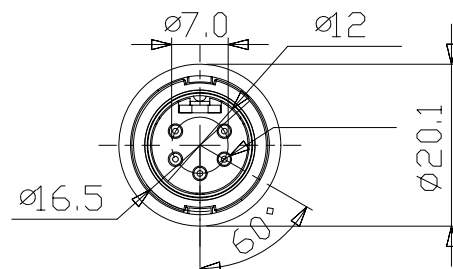

7	Strain Boot	PVC		1
6	Terminals	Brass	Silver Ptd.	5
5	Housing	ABS		1
4	Setscrew	Steel	Nickel Ptd.	1
3	"T" Holder	Steel	Nickel Ptd.	1
2	Screw Cap	Zn Alloy	Nickel Ptd.	1
1	Shield Cover	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DASM-PA-05B-LF

SERIES | LEADFREE
05 WAY B TYPE
ASSEMBLY
MALE

DESCRIPTION: