
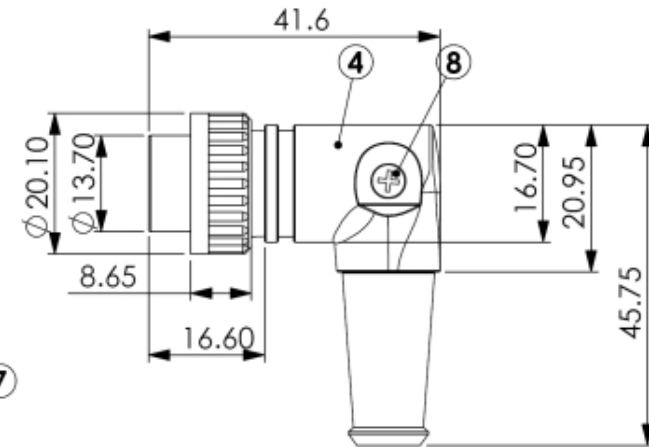
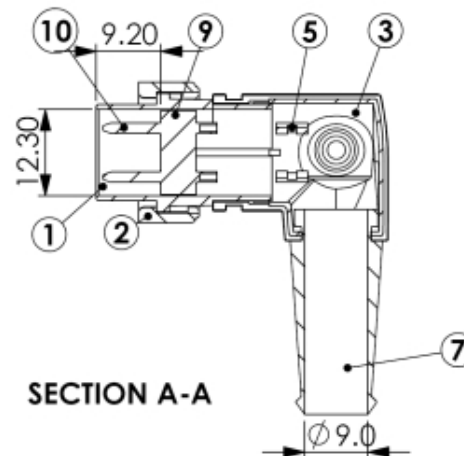


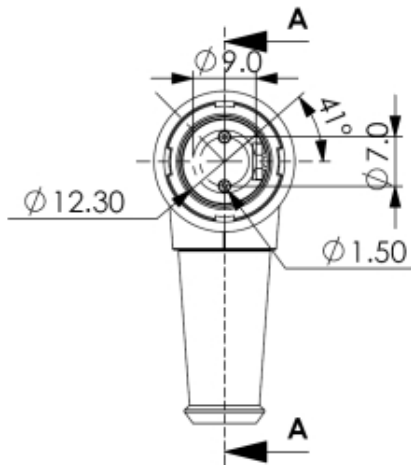

No.	Description	Material	Treat	Q'ty
1	Bayonet Cover	Zn Alloy	Nickel Ptd.	1
2	Bayonet Cap	Zn Alloy	Nickel Ptd.	1
3	R/A Cover A	Zn Alloy	Nickel Ptd.	1
4	R/A Cover B	Zn Alloy	Nickel Ptd.	1
5	T Holder	Steel	Nickel Ptd.	1
6	T Screw	Steel	Nickel Ptd.	1
7	Strain Boot	PVC		1
8	Screw	Steel	Nickel Ptd.	1
9	Housing	ABS+PC		1
10	Terminals	Brass	Silver Ptd.	2

Specifications rating :

100V AC 4A MAX

contact resistance :

pins-30mΩ MAX; shell-50mΩ MAX

insulation resistance :

MIN 100 MEGΩ @500V DC

voltage withstand :

250V AC R.M.S. for 1 minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DASM-PAR-02-LF

SERIES T T T LEADFREE
02 WAY
90°
ASSEMBLY
MALE

DESCRIPTION: