

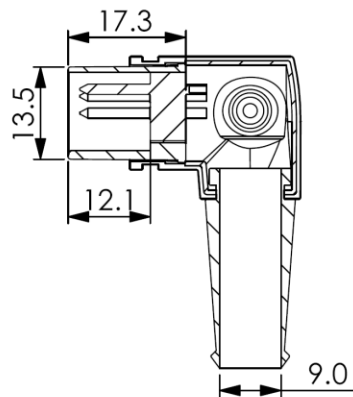
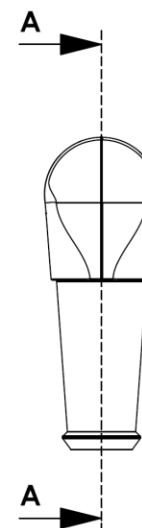


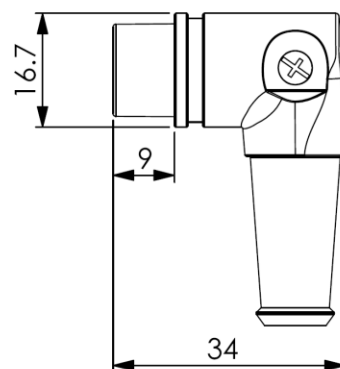

SECTION A-A

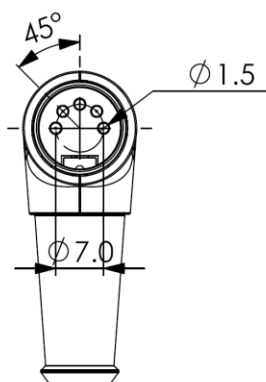

| No. | Description   | Material | Treat       | Q'ty |
|-----|---------------|----------|-------------|------|
| 1   | Shell Cover A | Zn Alloy | Nickel Ptd. | 1    |
| 2   | Shell Cover B | Zn Alloy | Nickel Ptd. | 1    |
| 3   | Shield Cover  | Zn Alloy | Nickel Ptd. | 1    |
| 4   | Strain Relief | PVC      |             | 1    |
| 5   | Screw         | Steel    | Nickel Ptd. | 1    |
| 6   | Housing       | PA66     |             | 1    |
| 7   | Terminals     | Brass    | Silver Ptd. | 5    |

#### Specifications

rating :

100V AC 4A MAX

contact resistance :

pins-30mΩ MAX; shell-50mΩ MAX

insulation resistance :

MIN 100 MEGΩ @500V DC

voltage withstand :

250V AC R.M.S. for 1 minute

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DASM-PAR-05-LF

SERIES

LEADFREE

05 WAY

90°

ASSEMBLY

MALE

DESCRIPTION: