

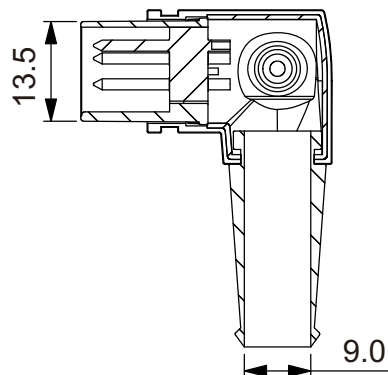
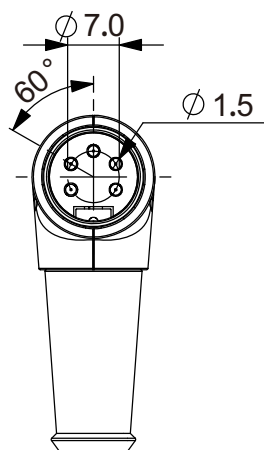
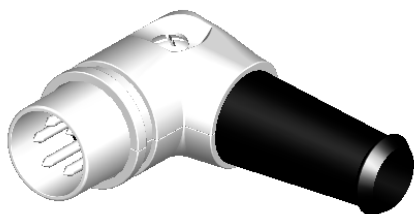


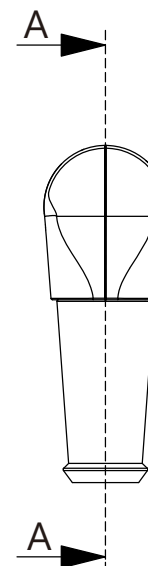

SECTION A-A

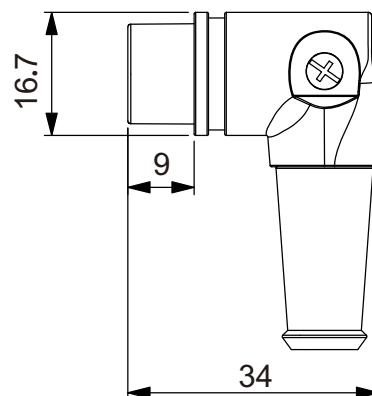

No.	Description	Material	Treat	Q'ty
1	Shell Cover A	Zn Alloy	Nickel Ptd.	1
2	Shell Cover B	Zn Alloy	Nickel Ptd.	1
3	Shield Cover	Zn Alloy	Nickel Ptd.	1
4	Strain Relief	PVC		1
5	Screw	Steel	Nickel Ptd.	1
6	Housing	PA66		1
7	Terminals	Brass	Silver Ptd.	5

Specifications

rating :

100V AC 4A MAX

contact resistance :

pins-30mΩ MAX; shell-50mΩ MAX

insulation resistance :

MIN 100 MEGΩ @500V DC

voltage withstand :

250V AC R.M.S. for 1 minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DASM-PAR-05B-LF

SERIES

LEADFREE

05 WAY B TYPE

90°

ASSEMBLY

MALE

DESCRIPTION: