











PART NO	DASM-PAR-03	DASM-PAR-04	DASM-PAR-05	DASM-PAR-05B	DASM-PAR-05C	DASM-PAR-06	DASM-PAR-07	DASM-PAR-08	DASM-PAR-08B
PARTS	3P	4P	5P			6P	7P	8P	
ANGLE	180°	216°	180°	240°	360°	240°	270°	270°	262°
POSITION OF VIEWS									

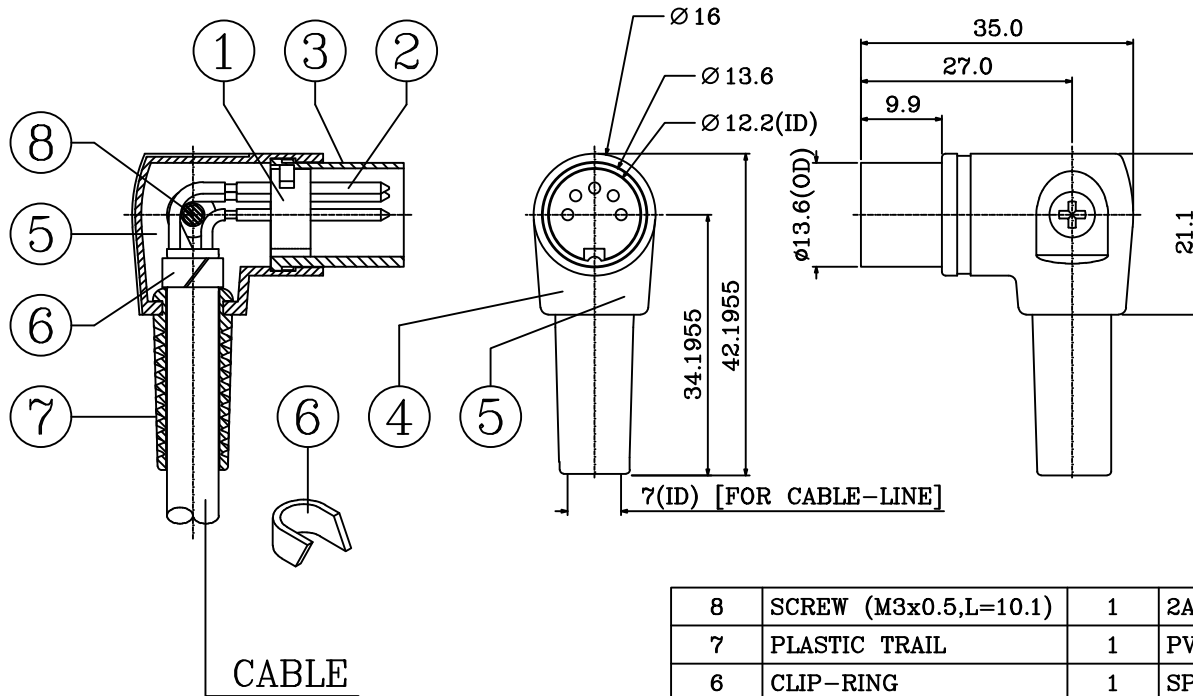

SPECIFICATIONS	
Dielectric strength	1,000V AC/1 Minute
Contact resistance	20mΩ MAX.
Insulation resistance	100MΩ Min. @ 500V DC
Rating	100V AC 2A
Insertion force	2.2 Kgf max per contact
Withdrawal force	2.0 Kgf max per contact

8	SCREW (M3x0.5,L=10.1)	1	2AAR1050	NICKEL	30-50u"
7	PLASTIC TRAIL	1	PVC		UL94
6	CLIP-RING	1	SPCC SB (0.8t)	NICKEL	20-30u"
5	BODY (R)	1	DIECAST	NICKEL	20-30u"
4	BODY (L)	1	DIECAST	NICKEL	20-30u"
3	COVER	1	DIECAST	NICKEL	20-30u"
2	CONTACT TERMINAL	5	HSR-H (1.5D) [R-35]	SILVER PLATED	30-50u"
1	PLASTIC CORE	1	NYLON [101]		UL94V-2
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DASM-PAR-xx-LF
SERIES T T T LEADFREE
90° 03-08WAY
ASSEMBLY
MALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

DESCRIPTION: