
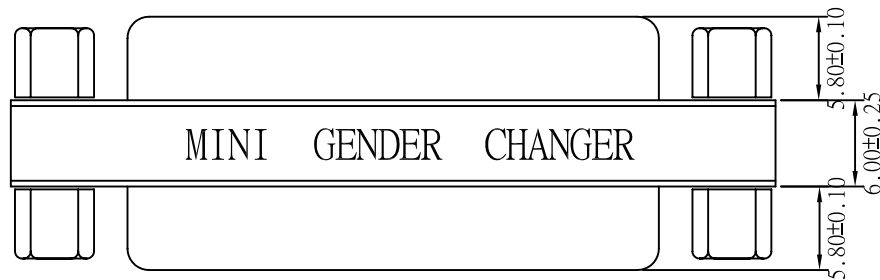


UNC #4-40 Hexscrew



UNC #4-40 Hexnut

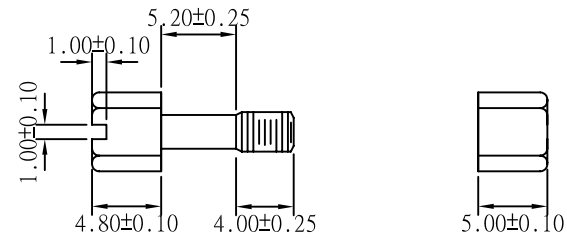

DB 25 F/F GENDER CHANGER

PIN OUT: 25Female

25Female

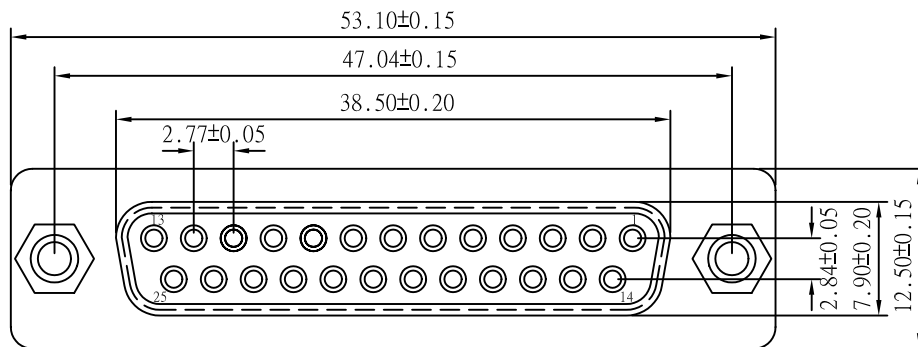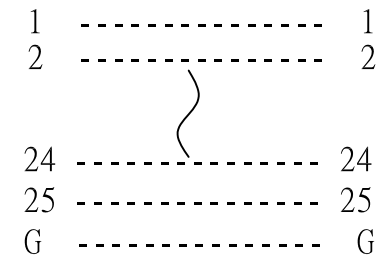

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C—+105°C

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. DBDB-FS-2525

DWG NO. DBDB-FS-2525

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.20  
.XX ± 0.15  
.XXX ± 0.05  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫有限公司