





UNC #4-40 Hexscrew



DB 09 M/M GENDER CHANGER

PIN OUT: 9Male

9Male

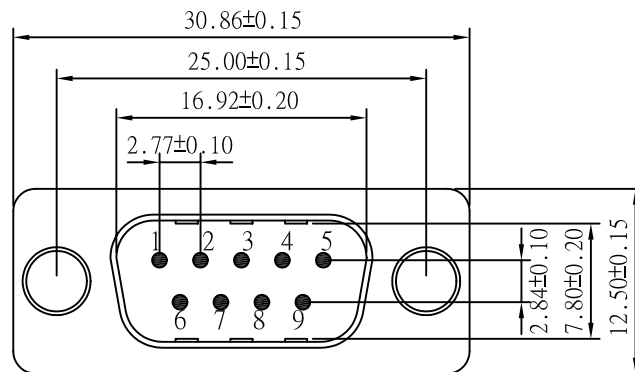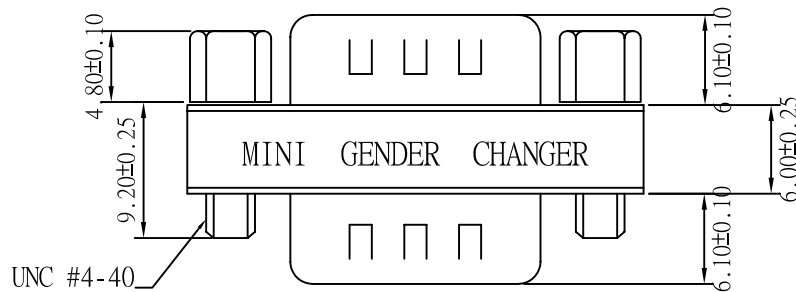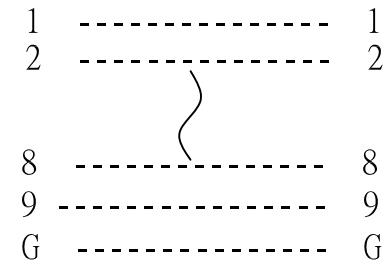

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 VO

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell (Nickel Silver)

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one Minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C → +105°C

MORE THAN ALL
CONNECTORS
ASSEMBLIES

PART NO. DBDB-MS-0909

DWG NO. DBDB-MS-0909

APPROVED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

.X ±0.2
.XX ±0.15
.XXX ±0.05
AWG

AREA

REVISIONS

HK

DATE

焯倫有限公司

UNIT / mm

SCALE 1:1

PROJECTION

