

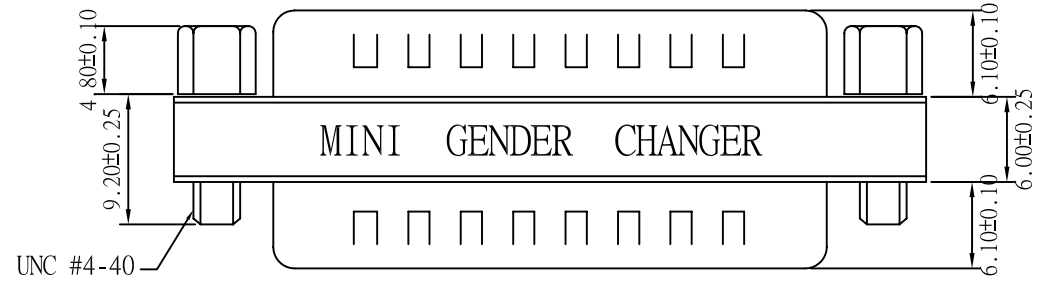
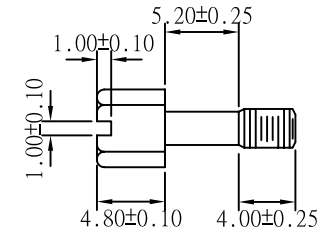


UNC #4-40 Hexscrew

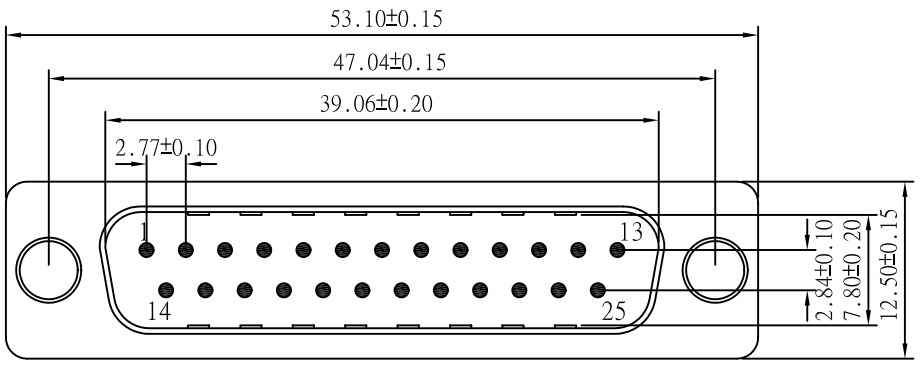

DB 25 M/M GENDER CHANGER
PIN OUT: 25Male

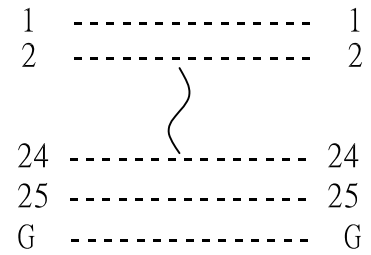

Label: yellow color with black character
 One side: MINI GENDER CHANGER
 The other side: U.S.A. PATENT 5199906 GENDER CHANGER
 SPECIFICATION
 INSULATOR: PBT Glass fibre reinforced UL 94 V0
 CONTACT: Brass
 CONTACT PLATING: Gold plated over nickel
 SHELL: Tin Plated Shell (Nickel Silver)
 CURRENT RATING: 3 AMP
 DIELECTRIC STRENGTH: 1000V AC for one minute
 INSULATOR RESISTANCE: 1000MΩ min at 500V DC
 TEMPERATURE: -55°C—+105°C

MORETHANALL
CONNECTORS
ASSEMBLIES

焜倫有限公司

PART NO. DBDB-MS-2525		APPROVED BY CY		TOLERANCES ARE .X ± 0.20 .XX ± 0.15 .XXX ± 0.05 AWG	DESCRIP TION:			
DWG NO. DBDB-MS-2525		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1:1							