


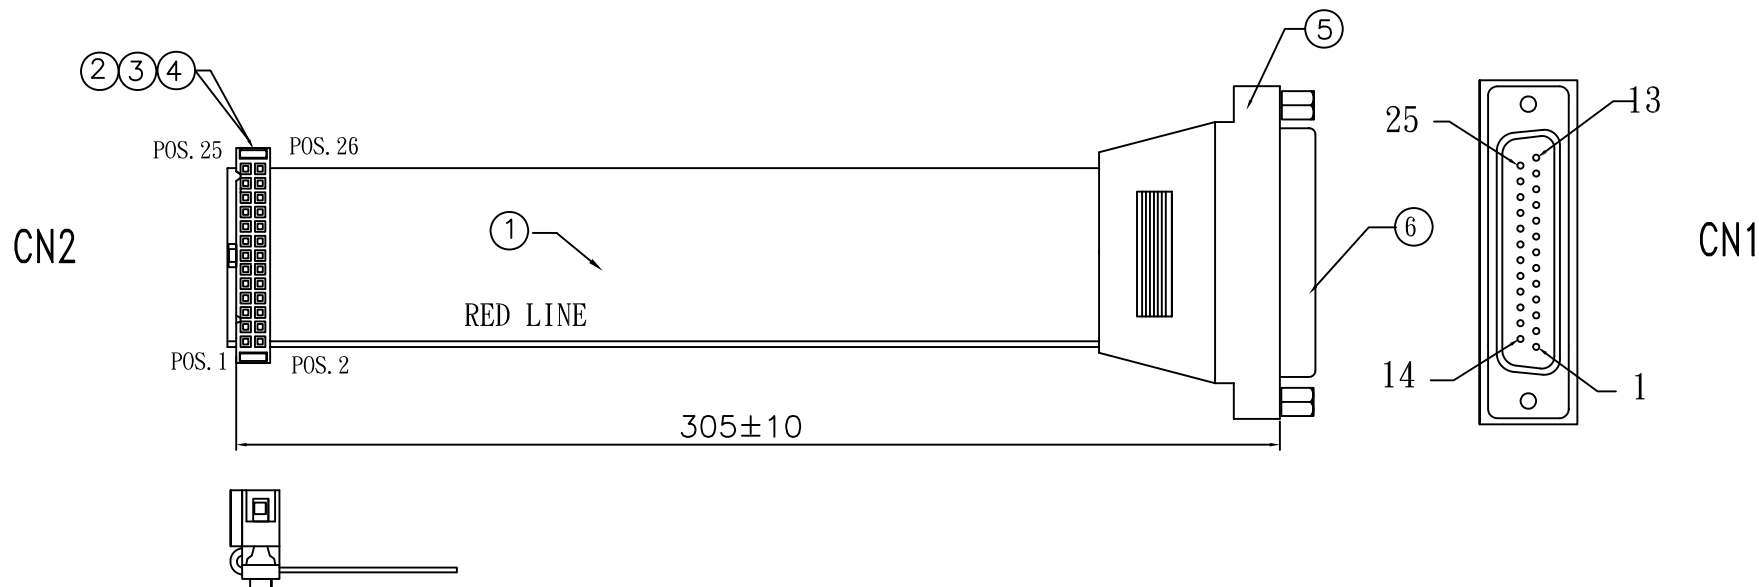

PIN DEFINITION

CN2	1	2	3	4	5	6	7	8	9	10	11	12	13
CN1	1	14	2	15	3	16	4	17	5	18	6	19	7

14	15	16	17	18	19	20	21	22	23	24	25	26
20	8	21	9	22	10	23	11	24	12	25	13	NC

1	FLAT CABLE UL2651 28AWG 25P PH1.27MM WITH RED LINE KT/HF "ROHS"	GRAY	190	mm
2	IDC 26P PH2.54MM CONNECTOR WITH NOSE G/F "ROHS"	BLACK	1	PCS
3	IDC 26P MIDDLE COVER "ROHS"	BLACK	1	PCS
4	IDC 26P STRAIN RELIEF "ROHS"	BLACK	1	PCS
5	DKN 25/25 "ROHS"	BLACK	1	PCS
6	D-SUB 25P FEMALE SOLER TYPE NICKEL PLATED "ROHS"	BLUE	1	PCS
NO	DESCRIPTION	COLOR	Q' TY	UNIT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DBF3-2526J1-F12N-LF

SERIES

LEADFREE

305mm

FEMALE TO FEMALE

JACKSCREW

25 TO 26 WAY

DESCRIPTION: I/O CABLE L:305mm