


P1
DB 9P MALE BLACK

P2
5.3*8.4mm

WIRING DIAGRAM

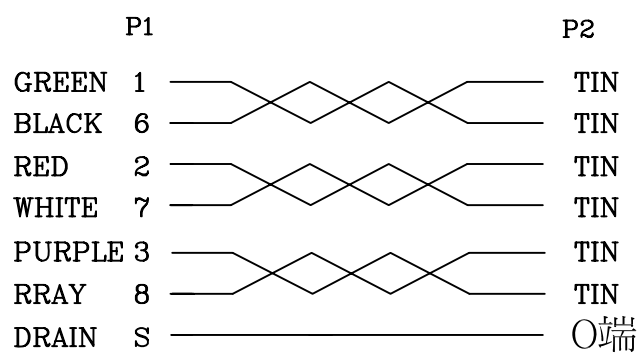

DBRT-0953-E82C8-LF
LEADFREE
RoHS Compliant

6	CABLE	25	g	45P #BLACK PVC
5	PE	13	g	#WHITE PE
4	TUBE	1	SET	SHRINK TUBE OD:1.0*35mm #BLACK
		1	SET	SHRINK TUBE OD:6.0*20mm #BLACK
3	TERMINAL	1	SET	5.3*8.4mm
2	CONNE.	1	SET	DB 9P/M (BLACK)
1	CABLE	820	mm	UL 2464 28AWG*3P(GREEN*BLACK,RED*WHITE, PURPLE*GRAY)+AEB OD:5.0mm #BLACK
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION



PART NO. DBRT-0953-E82C8		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG		DESCRIP TION: D-SUB 9P M TO TIN/5.3 端 L:828mm BLACK	
DWG NO. DBRT-0953-E82C8		DRAWING BY					
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1						

煜倫股份有限公司