


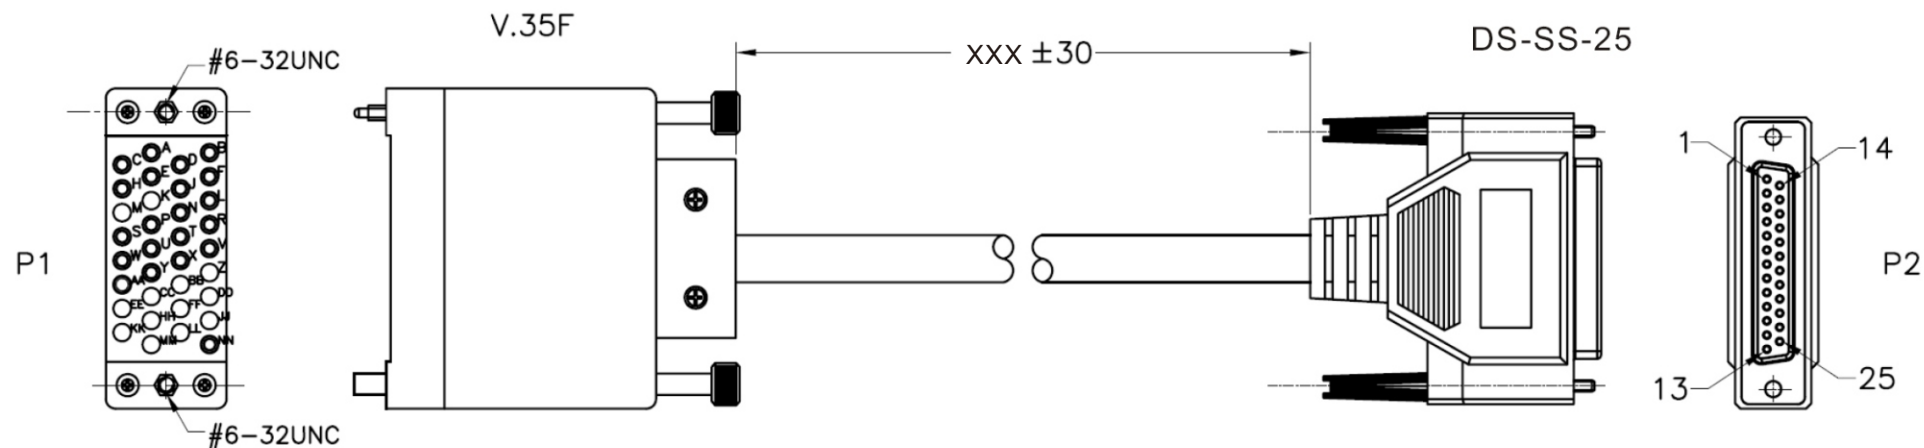

PIN OUT:

P1	P2	P1	P2
A	1	Y	15
P	2	AA	12
S	14	V	17
R	3	X	9
T	16	L	18
C	4	N	21
D	5	J	22
E	6	U	24
H	20	W	11
B	7	NN	25
F	8		

ITEM	PART NO.	DESCRIPTION	REMARK
1	DS-SS-25	D-SUB SOLDER FEMALE TYPE 25 WAYS	1
2	V.35F	V.35 FEMALE	1
3	810A-21C24BXXBK	UL2464 21C*28AWG+AL+DRAIN+BRAID OD:XXMM COLOR:BLACK	1
4	827-PVC-50P	PVC MOLDING BALCK 50P	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DBV35-253428-Fxxx-LF

SERIES LEADFREE

35C:35CM

50C:50CM

2M:2000mm

25 TO 34 WAY FEMALE TO FEMALE

28 AWG

DESCRIPTION: