

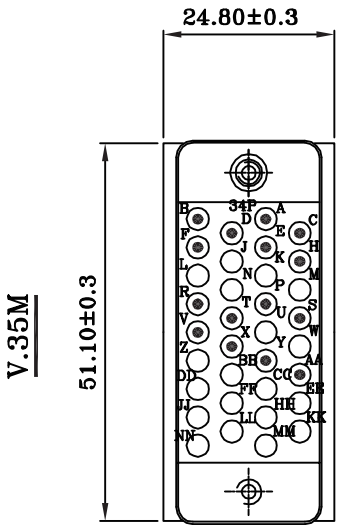
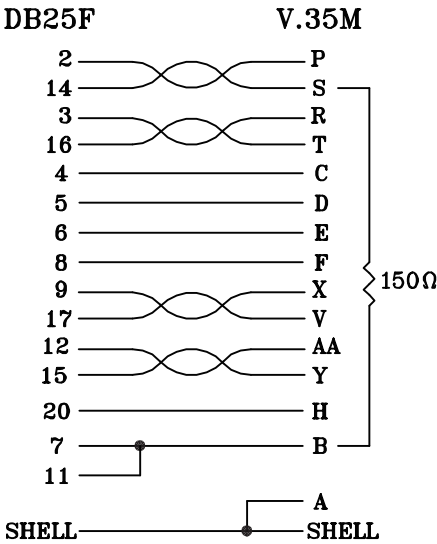


WIRE DIAGRAM

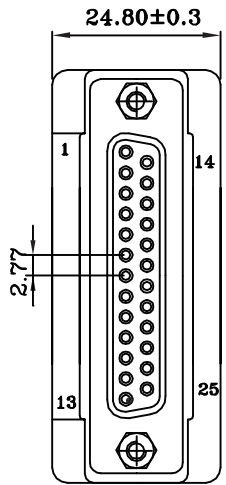

Label:

486P
V.35
Adapter

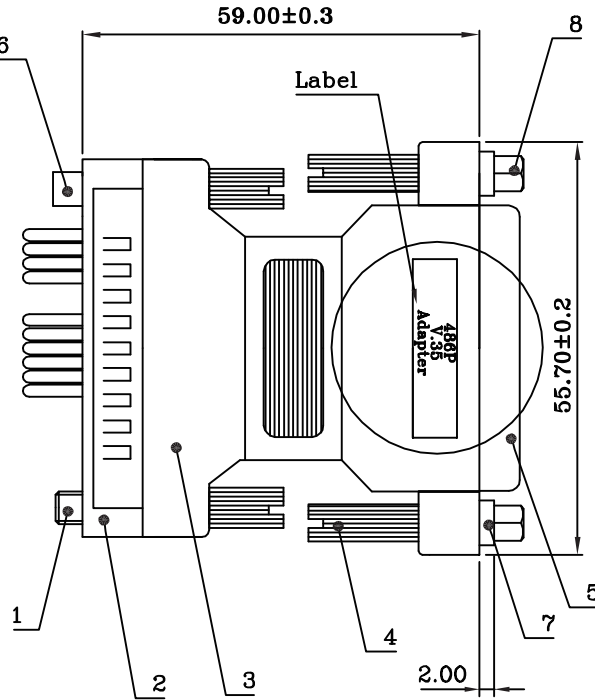

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

COMPONENTS	DESCRIPTION	Q'TY
1 Jackscrew	UNC #6-32 Metal Nickel Plated	1
2 V.35M(15P)	V.35 15P Male Connector Front Shell: Ferrum Nickel Plated Insulatr: Black P.B.T Contact: Phosphor Bronze 3u" Gold Plated	1
3 Hood	P.V.C Molded Color: Beige Inner Molded With Copper Foil Shielded	1
4 Jackscrew	UNC #4-40 Metal Nickel Plated	2
5 DB25F	D-SUB 2.77mm 25P Female Connector. Shell: Steel Nickel Plated Insulator: Black P.B.T. Contact: Brass G/F Gold Plated	1
6 Screw Lock	UNC #6-32 Metal Nickel Plated	1
7 Washers	Metal Nickel Plated	2
8 Screw Lock	UNC #4-40 Metal Nickel Plated	2



Washer

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

DBV35-AM-2534-LF

SERIES

25 PIN/34 PIN

LEADFREE

MOLDING

FEMALE TO MALE

DESCRIPTION: