


1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A

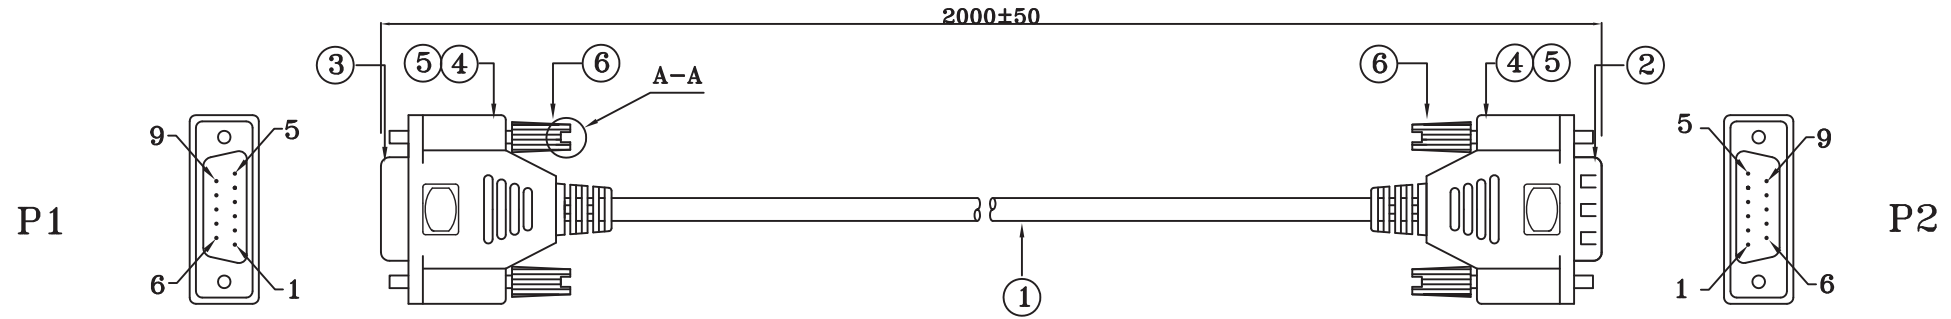

WIRE ARRANGEMENT		
P1		P2
1	—————	1
2	—————	2
3	—————	3
4	—————	4
5	—————	5
6	—————	6
7	—————	7
8	—————	8
9	—————	9
SHELL	—————	SHELL

DBX2-0909-E2M-LF
LEADFREE
RoHS Compliant

6.	THUMB SCREW:#4-40UNC MOLDED PANTONE BLACK.
5.	COPPER FOIL:25x50mm
4.	PLASTIC HOOD MOLDED PANTONE BLACK.
3.	D-SUB: 9PIN,FEMALE,SOLDER TYPE.INSULATOR:BLUE
2.	D-SUB: 9PIN,MALE,SOLDER TYPE.INSULATOR:BLUE
1.	CABLE:UL2464 28AWGx9C+EA,PVC JACKET BLACK. OD=ø6.0±0.2mm.
NO.	NOTES:



PART NO.DBX2-0909-E2M		CHECKED BY CY		TOLERANCES ARE		DESCRIP TION:	
DWG NO. DBX2-0909-E2M		DRAWING BY		.X ± 0.2 .XX ± .XXX ± AWG			
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE

煜倫股份有限公司