


P1.

DB9P/M

P2.

DB9P/F

WIRING DIAGRAM

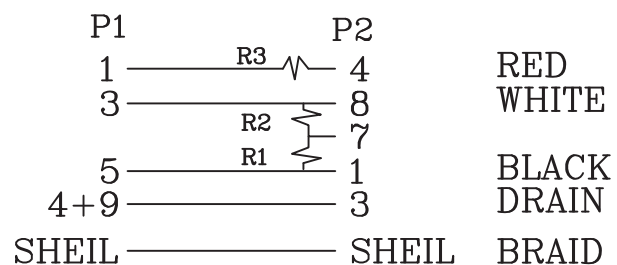

7	R3	1	PCS	R 3.2KOM 1/4W
6	R1&R2	2	PCS	R 6.2KOM 1/4W
5	FOIL	2	PCS	COPPER FOIL 360°SOLDERED 30*90mm
4	SCREW	2	PCS	#4-40 DE24mm SCREW
3	CONN.	1	PCS	D-SUB 9P FEMALE #BLACK
2	CONN.	1	PCS	D-SUB 9P MALE #BLACK
1	CABLE	3000	mm	UL2464 26AWG 3C+AEB OD:3.5mm #BEIGE
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DBX2-090926P14-E3M-LF

SERIES

LEADFREE

3000mm

MALE TO FEMALE

WIRING 1 TO 4

26 AWG

09 TO 09 WAY

DESCRIPTION: DB9PM/F/3M/BEIGE