



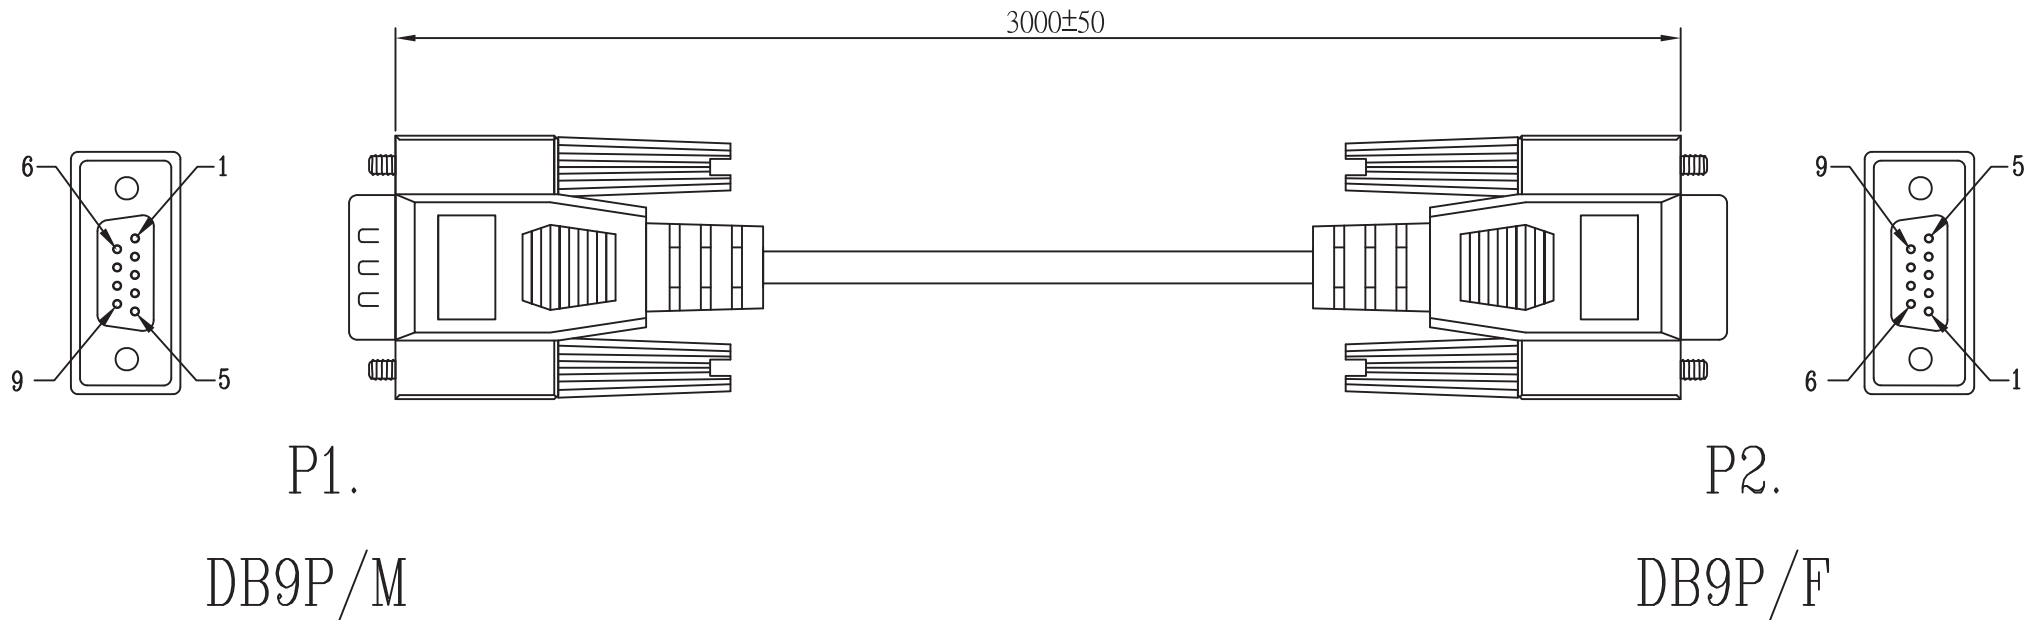

WIRING DIAGRAM

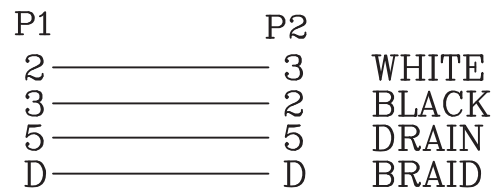

5	FOIL	2	PCS	COPPER FOIL 360°SOLDERED 30*90mm
4	SCREW	2	PCS	#4-40 DE24mm SCREW
3	CONN.	1	PCS	D-SUB 9P FEMALE #BLACK
2	CONN.	1	PCS	D-SUB 9P MALE #BLACK
1	CABLE	3000	mm	UL2464 26AWG 2C+AEB OD:3.5mm #BEIGE
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DBX2-090926P23-E3M-LF

SERIES

LEADFREE
3000mm
MALE TO FEMALE
WIRING 2 TO 3

26 AWG
09 TO 09 WAY

DESCRIPTION: DB9PM/F/3M/BEIGE