

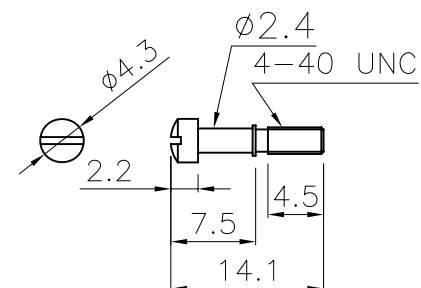
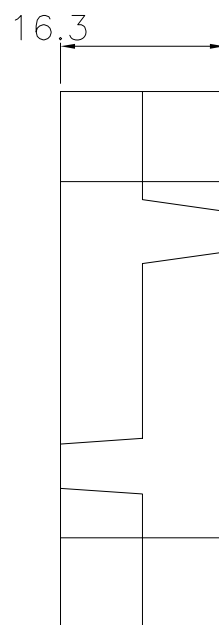


SPECIFICATION
 INSULATOR : ABS UL94HB
 SCREW: STEEL
 FINISHED : CHROMATE PLATED

INSULATOR COLOR
 K=BLACK (黑色)
 G=GREY (灰色)
 B=BEIGE (貝吉色)
 C=METALIZED (電鍍)

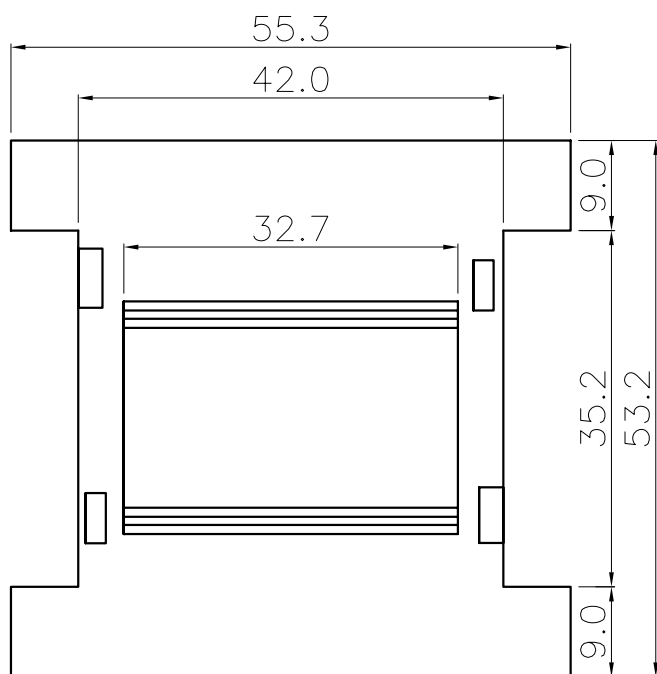

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DBX2-AQx1-2525-LF

SERIES

25 TO 25 WAY

LEADFREE

SINGLE PACKING

K:BLACK

G:GRAY

B:BEIGE

QUICK C:CHROMATE

FEMALE TO MALE

DESCRIPTION: