



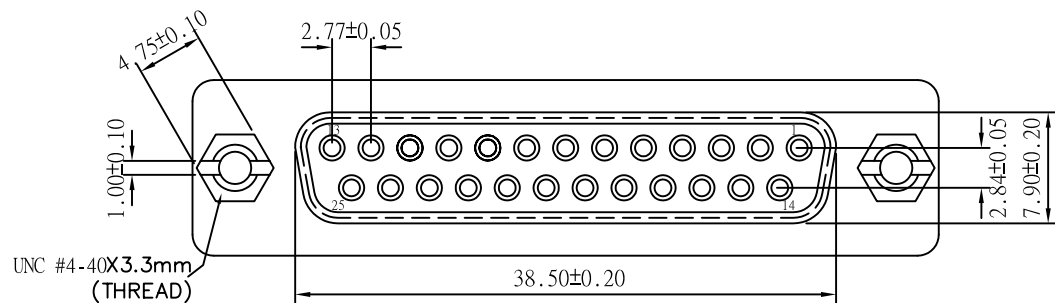

UNC #4-40 Hexscrew



MA 004A (DB25M/F ADAPTOR)

PIN OUT: 25Male

25Female

1	-----	1
2	-----	3
3	-----	2
4	-----	5
5	-----	4
6	-----	20
8	-----	
7	-----	7
20	-----	6
G	-----	8
	-----	G

Label: orange color with white charactor

One side: NULL MODEM

The other side: MINI ADAPTER



SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

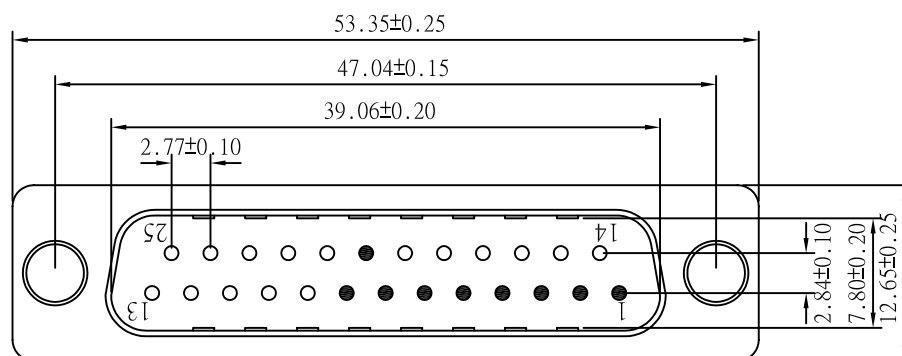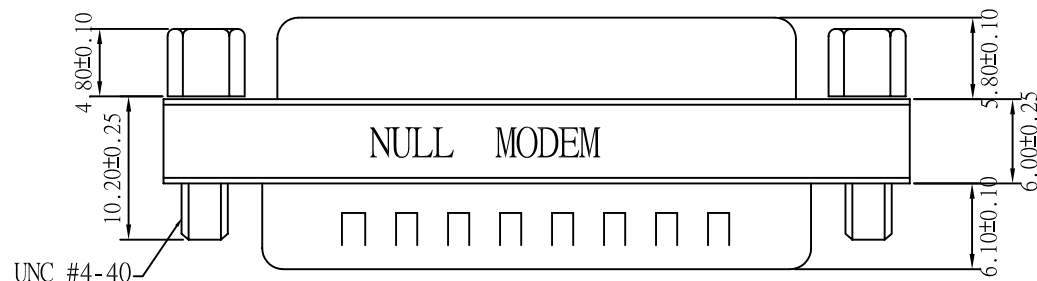

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

ORDER INFORMATION

DBX2-ESNM-2525-LF

SERIES

LEADFREE

25 TO 25 WAY

NULL MODEM

MALE TO FEMALE

DESCRIPTION: