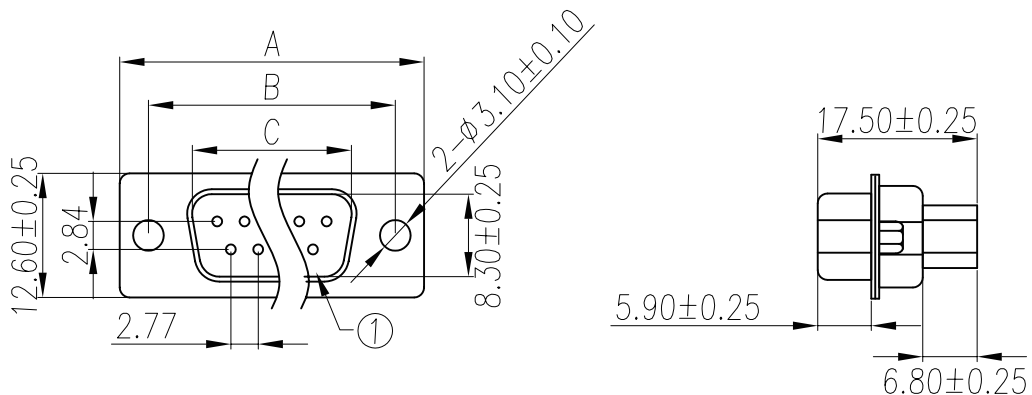


|   |       |            |   |            |   |            |
|---|-------|------------|---|------------|---|------------|
| A | 9PIN  | 30.80±0.25 | B | 25.00±0.25 | C | 16.92±0.25 |
|   | 15PIN | 39.20±0.25 |   | 33.32±0.25 |   | 25.25±0.25 |
|   | 25PIN | 53.05±0.25 |   | 47.04±0.25 |   | 38.96±0.25 |
|   | 37PIN | 69.40±0.25 |   | 63.50±0.25 |   | 55.42±0.25 |

Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding volage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Temperature range: -55°C~+105°C

|     |               |              |                   |                     |                                                                                                               |
|-----|---------------|--------------|-------------------|---------------------|---------------------------------------------------------------------------------------------------------------|
| 8   | 5.8 Nut       | 2            | Brass             | H4.75*5.8           | 80u"Min Nickel Plated                                                                                         |
| 7   | 4.0 Nut       | 2            | Brass             | H4.75*5.5           | 80u"Min Nickel Plated                                                                                         |
| 6   | 8.0 Nut       | 2            | Brass             | H4.75*8.0           | 80u"Min Nickel Plated                                                                                         |
| 5   | 3B Nut        | 2            | Brass             | H4.75*4.75          | 80u"Min Nickel Plated                                                                                         |
| 4   | Back-shell    | 1            | Cold Rolled Steel | T=0.40mm            | Cu:40u"min. 80u"Min Tin Plated                                                                                |
| 3   | Front-shell   | 1            | Cold Rolled Steel | T=0.40mm            | Cu:40u"min. 80u"Min Nickel Plated                                                                             |
| 2   | Contact       | 9<br>~<br>37 | Brass             | T=0.20mm            | Contact area:0.8u"min Gold Plated over 40u"Nickel min.<br>Solder area:80u"min Tin Plated over 40u"Nickel min. |
| 1   | Back Housing  | 1            | PA66              | UL 94-V0            | Black/Blue/White                                                                                              |
|     | Front Housing | 1            | P.B.T             | UL 94-V0            | Black/Blue/White                                                                                              |
| No. | Part Name     | Q'ty         | Material          | Remarks & Thickness | Finish                                                                                                        |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ± 0.10  
ANG ± 1°

照片框

ORDER INFORMATION

DC-PN-xx-LF  
SERIES T LEADFREE  
09~37 WAY  
NUT  
MALE

DESCRIPTION: D-SUB CRIMP 9~37PIN(M)