

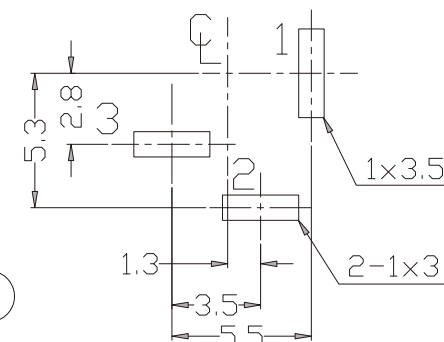
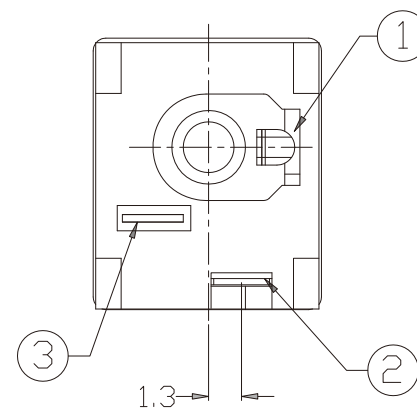


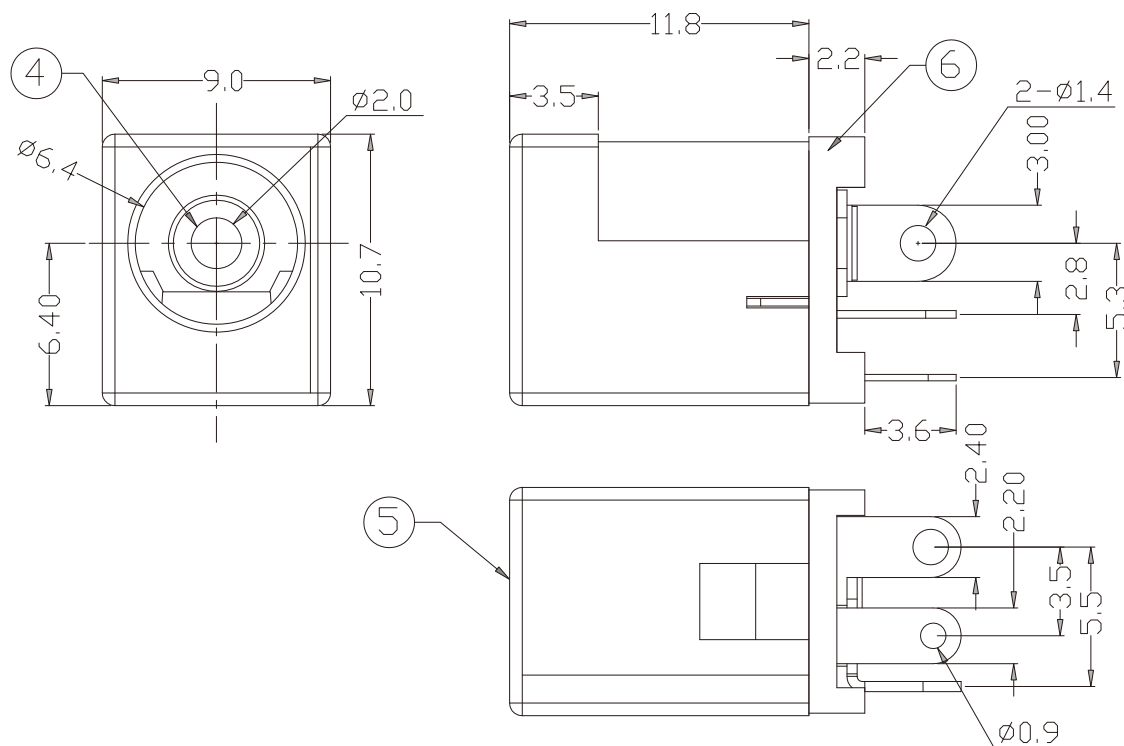

PCB LAYOUT
(BOTTOM VIEW)



NO.	NAME	MATERIAL	FINISH	Q'TY
1	PIN TERM.	BRASS T:0.4	TIN PLATED	1
2	SLEEVE TERM.	PHOS. BRONZE T:0.25	TIN PLATED	1
3	BREAK TERM.	BRASS T:0.4	TIN PLATED	1
4	CENTER PIN	BRASS Ø2.0	NICKEL PLATED	1
5	HOUSING	PBT G.F.	BLACK	1
6	BOTTOM COVER	PBT G.F.	BLACK	1

Specification:

Contact Resistance: 30m Ohm Max. At AC 100mA Max .1KHz
Insulation Resistance: 100M Ohm Min. At 500V DC
Rated Voltage And Current: DC12V.2A Max; AC 100V.1A Max
Dielectric Withstanding Voltage: 500V AC for 1 Minute
Insertion Force: 3.0Kg Maximum.
Extraction Force: 0.3Kg Minimum.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.38

.X ± 0.25

.XX ± 0.13

.XXX ± 0.05

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCJ-D-20-LF
SERIES T LEADFREE
2.00
DIP 180°

DESCRIPTION: DC POWER JACK