

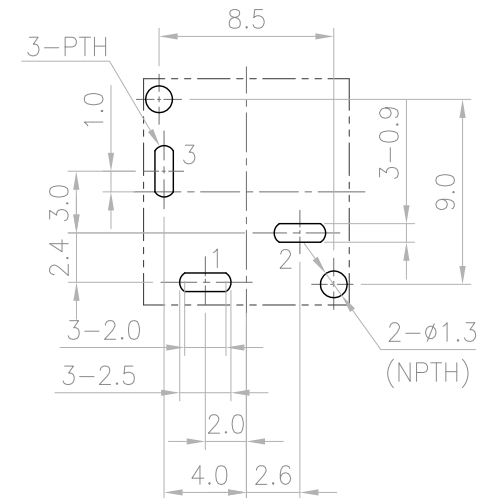
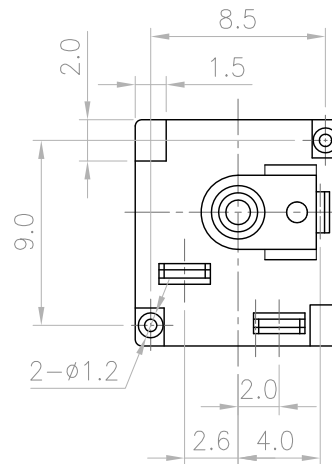
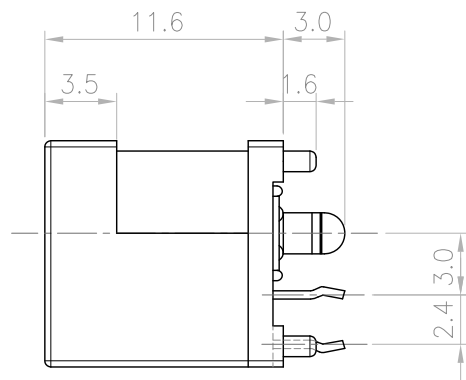
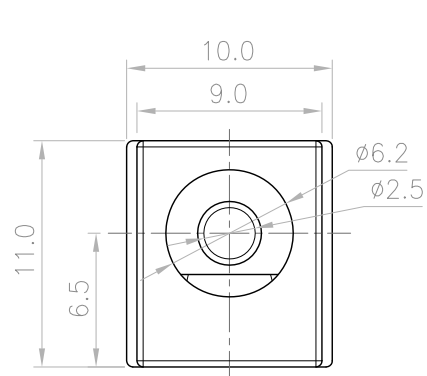



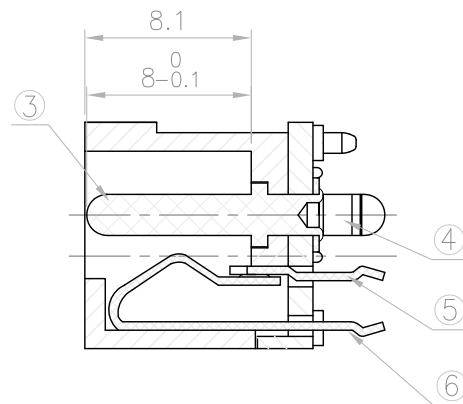

Recommend PCB Layout  
PCB Top View

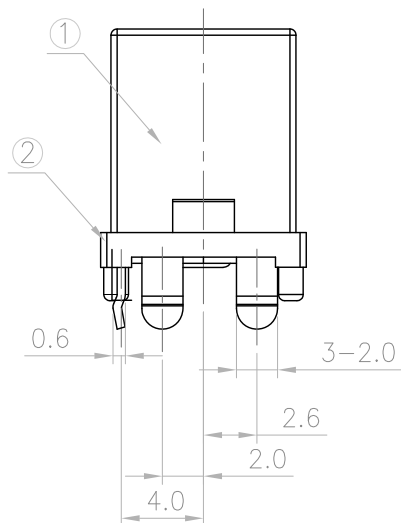

| LTR | PART NAME | QTY | MATERIAL | REMARK           |
|-----|-----------|-----|----------|------------------|
| 6   | SPRING    | 1   | C5191    | t:0.30 Ag PLATED |
| 5   | SPRING    | 1   | C2680    | t:0.30 Ag PLATED |
| 4   | TERMINAL  | 1   | C2680    | t:0.30 Ag PLATED |
| 3   | PIN       | 1   | H59      | Cu/Sn PLATED     |
| 2   | COVER     | 1   | PBT      | UL94V-0(BLACK)   |
| 1   | HOUSING   | 1   | PBT      | UL94V-0(BLACK)   |

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL:  $\pm 0.3$

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

照片框

ORDER INFORMATION

DCJ-DH11P-25-LF  
SERIES POST HIGH 11.6mm  
LEADFREE 2.50  
180° SMT

DESCRIPTION: DC POWER JACK