


CAT. NO.	PIN	SCHEMATIC
DCJ-DH16-20	φ2.0	

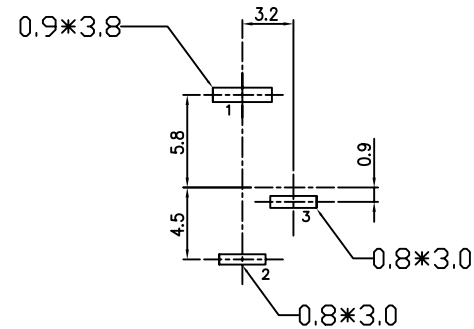

T:1.6 Dimensions of PC board holes
Tolerance : ±0.05(Printed-top view)

6	HOUSING	1	PBT	UL94V-0
5	COVER	1	PA9T	UL94V-0
4	CENTER PIN	1	COPPER ALLOY	Ni PLATED
3	TERMINAL	1	C2680	Sn PLATED
2	TERMINAL	1	C2680	Sn PLATED
1	TERMINAL	1	C2680	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

SIZE A4

P PROJECTION

ANG±

照片框

ORDER INFORMATION

DCJ-DH16-20-LF
SERIES | T | LEADFREE
2.0Ø
HIGH 15.6mm
180° SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: DC POWER JACK