
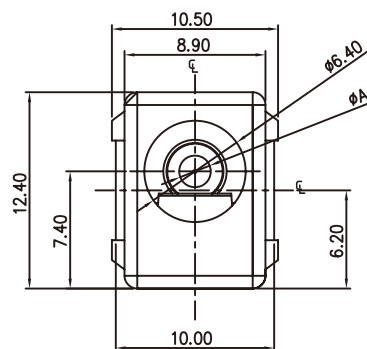
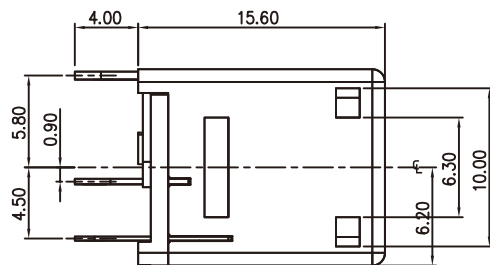
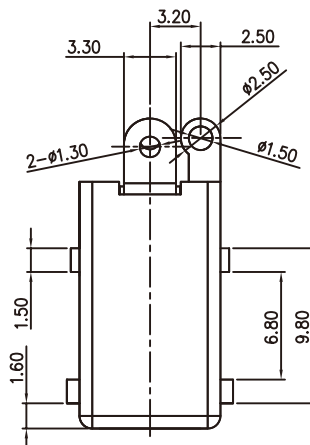

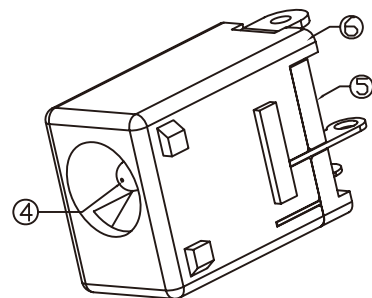


CAT. NO.	PIN	SCHEMATIC
DCJ-DH16-25	2.5	

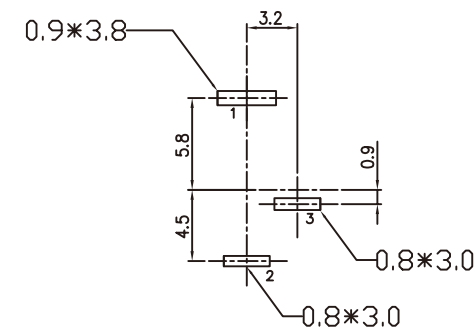

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

6	HOUSING	1	PBT	UL94V-0
5	COVER	1	PA9T	UL94V-0
4	CENTER PING	1	COPPER ALLOY	Ni PLATED
3	TERMINAL	1	C2680	Sn PLATED
2	TERMINAL	1	C2680	Sn PLATED
1	TERMINAL	1	C2680	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-DH16-25-LF
SERIES T LEADFREE
2.50
HIGH 15.6mm
180° SMT

DESCRIPTION: DC POWER JACK