


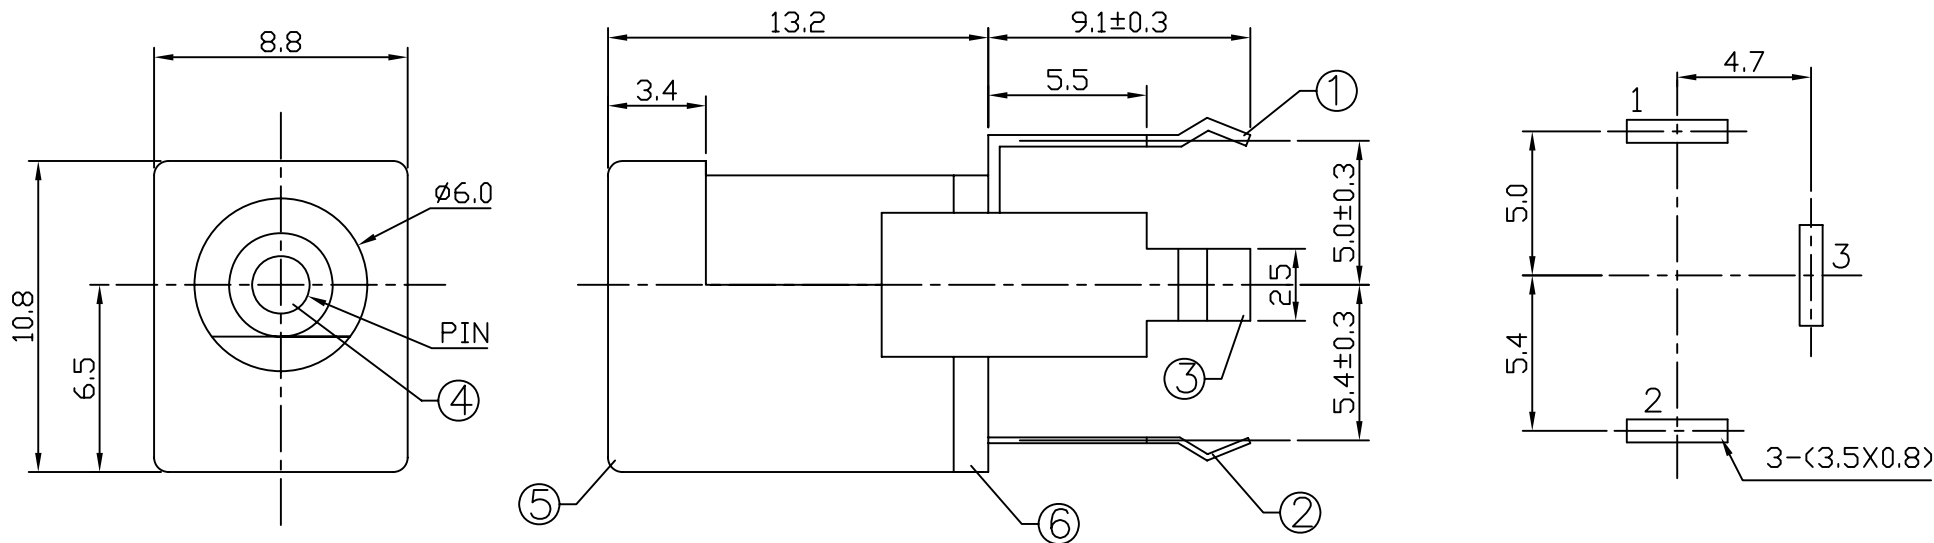

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.1 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-DH18-20	$\phi 2.0$	
DCJ-DH18-25	$\phi 2.5$	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	COVER	1	PF	
5	HOUSING	1	PBT 4815	UL-94V0(BLACK)
4	PIN	1	C2680	MB:Cu Ni PLATED
3	3# FLAT PIECE	1	C2680	MB:Cu Cu/Sn PLATED
2	2# SPRING	1	SUS301	MB:Cu Cu/Sn PLATED
1	1# CONTACT FOOT	1	C2680	MB:Cu Cu/Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-DH18-xx-LF
SERIES T LEADFREE
20:2.00
25:2.50
HIGH 18.5mm
180° SMT

DESCRIPTION: DC POWER JACK