
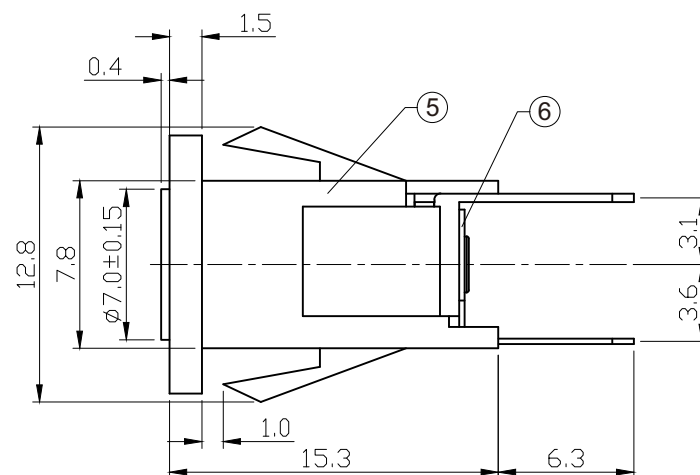
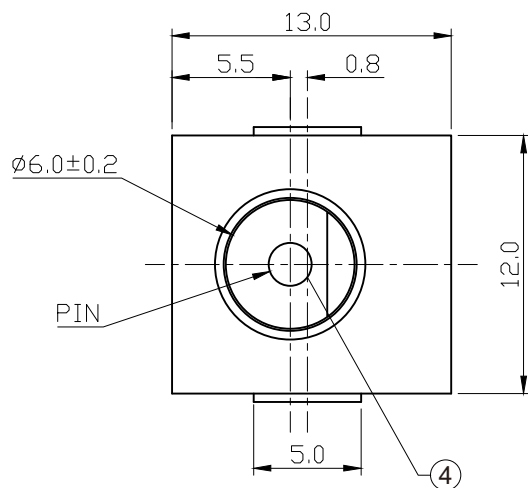
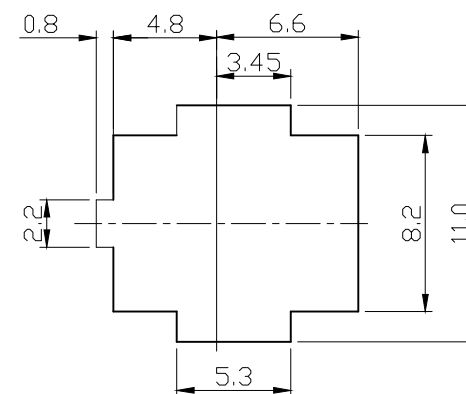


T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

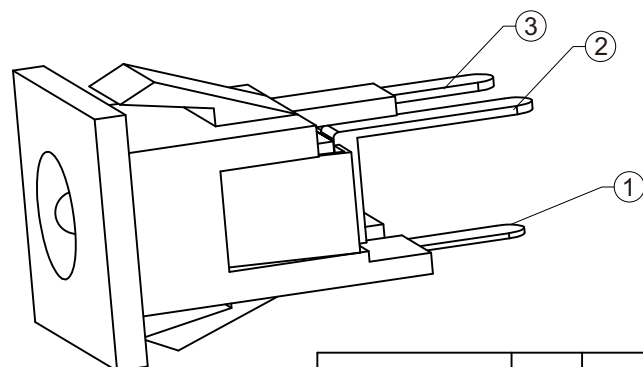

PANEL CUT OUT (TOP VIEW)

CAT. NO.	PIN	SCHEMATIC
DCJ-DPA-25	$\phi 2.5$	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	COVER	1	PF	UL-94V0
5	HOUSING	1	PA66	BLACK
4	PIN	1	H59(COPPER ALLOY)	Cu/Sn PLATED
3	CURVE PIECE	1	C2680 t=0.40	Ag PLATED
2	SPRING	1	C5191 t=0.25	Ag PLATED
1	FLAT PIECE	1	C2680 t=0.40	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-DPA-25-LF
SERIES T LEADFREE
2.5DIA
PANEL FRONT
DIP 180°

DESCRIPTION: DC POWER JACK